

## Gas Spring Mounting Guidelines

Edition 2.2016  
© Copyright KALLER



# Mounting Guidelines

*KALLER gas springs are engineered for use in modern day, metal stamping dies and plastic moulding tools. Over the years, KALLER has developed a wide range of mounting methods for the gas springs. The following is intended as a reminder of the correct procedure when using these various mounting methods.*

## Mounting method overview

Generally speaking, KALLER gas spring cylinders are machined with two external grooves. The C-groove being located towards the cylinder opening and a U-groove or second C-groove located just above its base. These grooves allow various flange mounts to be attached. It is then the flange mount that is clamped to the tool using mounting screws of a suitable length, property class and torque setting (see next page for more details). Only use mounts manufactured or approved by KALLER.



### Drop-In

The gas spring is dropped into a flat bottomed pocket within the die.




### Base mount

The gas spring's base threaded holes are used to mount the gas spring directly to the tool or indirectly via a base mounting plate.




### Foot mount

A flange mount is used to clamp the base of the gas spring to the tool using the gas spring's lower U or C groove.




### Top mount

A flange mount is first attached to the gas spring's upper C-groove before being mounted into a hole in the die.



### Thread mount

A section of the gas spring's cylinder, which has an external thread (either cylinder body or base stud), is used to install the gas spring in the die. In some cases with an additional lock nut or flange mount.



### Body mount

The body mounts are attached to the gas spring to allow it to be installed in any orientation within the die, from vertically upright through to vertically upside down.

## Mounting screws



When mounting the gas spring directly to the tool or via a flange mount, it is important to observe the following recommendations in order to prevent the gas spring or its mounting accessories from working loose into the tool.

### Recommendations:


Screws should have a free length (clamping length) of 2 to 4 times their thread diameter and a thread depth of at least 1.5 times their thread diameter in steel and 2 times their thread diameter in cast iron. If the free length cannot be achieved in any other way, the screw holes should be countersunk (see below). Please note that the specifications in automotive standards may differ. Always use a torque wrench to apply the appropriate torque for the class of screws used.

Thread	Torque (for screw class 8.8 according to ISO 898-1)
M6	10 Nm
M8	24 Nm
M10	45 Nm
M12	80 Nm
M16	160-200 Nm

## For all types of flange mounting using mounting screws:

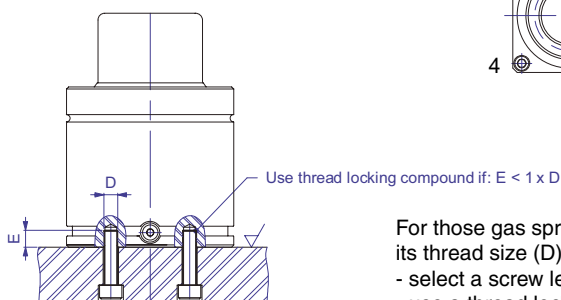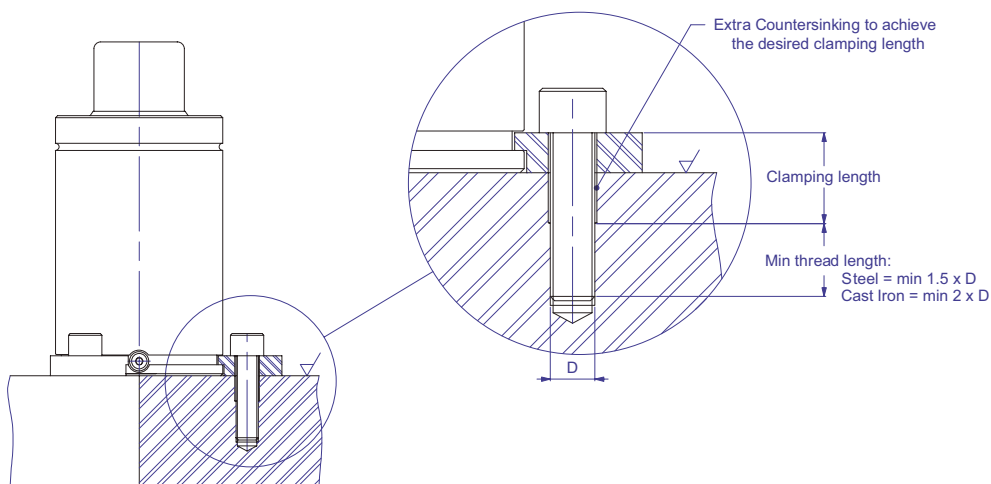

For example: X 2400



When tightening the mounting screws in the tool, apply an evenly cross like pattern according to the picture (1-2-3-4). Otherwise there is a risk for the mount to tilt.

For those gas springs whose thread depth (E) is less than 1 times its thread size (D) we recommend the following:

- select a screw length to engage all available thread depth
- use a thread locking compound (middle strength or higher)
- ensure the correct screw torque setting is applied

# Mounting Guidelines

## Mounting method: Drop-In

**For stroke lengths < 25 mm:** base threaded holes are optional for stroke lengths up to and including 25 mm.

**For stroke lengths > 25 mm:** base threaded holes should always be used for longer stroke lengths to prevent possible side loads and/or gas spring movement within the pocket.

**Gas spring orientations:** only vertically upright installations are recommended (see **Warning!**).


**Hole depth:** min 70% of the spring's Lmin length to ensure sufficient support and reduce the risk of side loading.

**Hole diameter:** +0.5 to +1.0 mm greater than the gas spring's cylinder diameter.

**Hole drainage:** recommended wherever drawing fluids and/or liquid coolants are used in the die.



**Link systems:** Not recommended for stroke lengths < 25 mm.

**Warning!** Never drop a gas spring into a pocket upside down as this may lead to excessive wear on the outside of the tube.



Always observe pocket dimension recommendations


Use correct screw length



Use Drop-In and Base Thread: B together for longer stroke lengths




Never mount a gas spring in a pocket that does not fully support its base



Never mount a gas spring in a pocket upside down

Never spray gas springs with coolants and/or drawing fluids

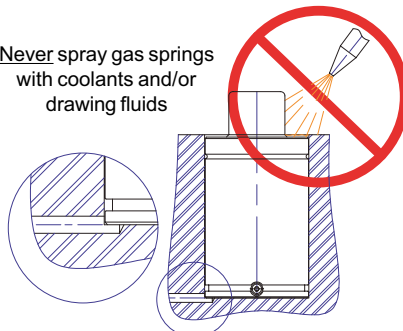

Always provide pocket drainage if coolants are used in the die

## Mounting method: Base Mount (B, MP, NMP)

### Stroke length suitability:

For cylinder diameters  $< \varnothing 25$  = Max stroke 25 mm

For cylinder diameters  $> \varnothing 25$  = OK for all stroke lengths

**Gas spring orientations:** Vertically upright - OK for all stroke lengths


Vertically upside down - OK up to stroke 125 mm\*

**Link systems:** this mounting method is very suitable for gas link systems

\*For thread depths less than 1 times its thread size use a screw length that engages all thread depth, use a thread locking compound (middle strength or higher) and apply correct screw torque setting




### For: B (Base thread)

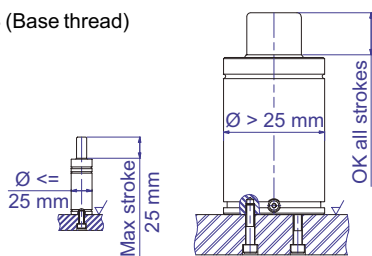

If the gas spring has only a single base threaded hole, then the max stroke length for this mounting method should not exceed 25 mm

### For: MP, NMP

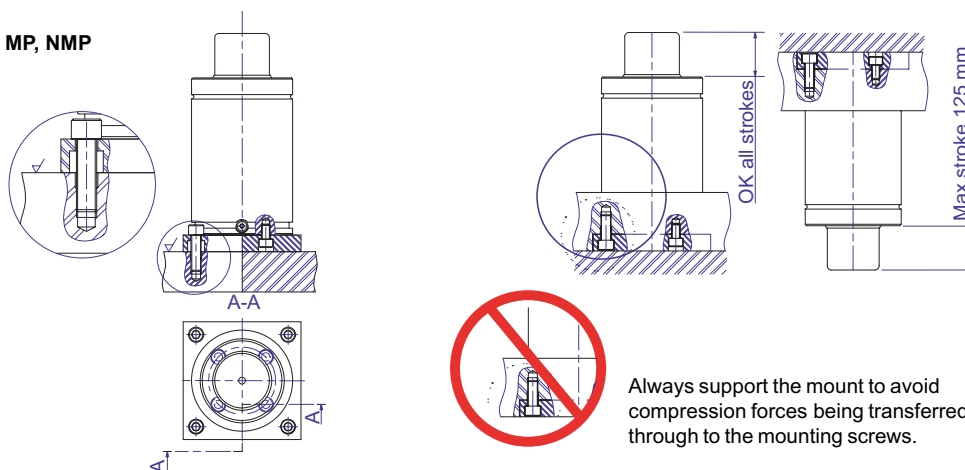

Always support the mount to avoid compression forces being transferred through to the mounting screws.

# Mounting Guidelines

## Mounting method:

### Foot mount (BF, FCR, FFC, FFL, FSL, FSS, RM)

#### Gas spring orientations:

Vertically upright = OK for all stroke lengths

Vertically upside down = OK up to 125 mm stroke (see **Warning!** below)


**Link systems:** this mounting method is generally suitable for gas link systems, with the exception of the BF, FCR, FSL and FSS flange mounts that do not fully prevent rotation of the gas spring.

**Note!** A small gap between Foot Mount and mounting surface is normal before the gas spring is clamped to the die using the mounting screws.


**Warning!** K-lugs are not recommended for vertically upside down installations. Wherever possible, vertically upside down installations using Foot Mounts should be used in combination with base threaded holes to prevent gas spring rotation within the flange and to provide additional security.




#### For: BF, FCR

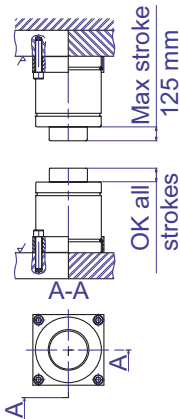


#### For: FSL, FSS

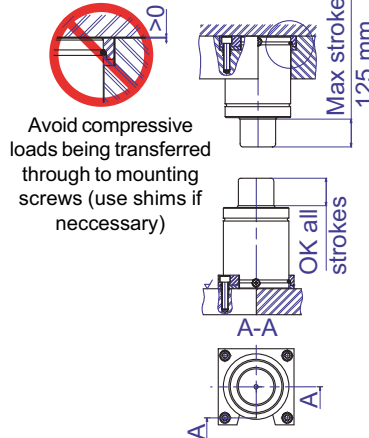


#### For: RM

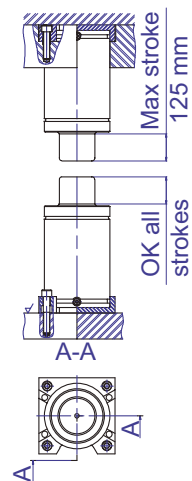

#### For: FFC, FFL

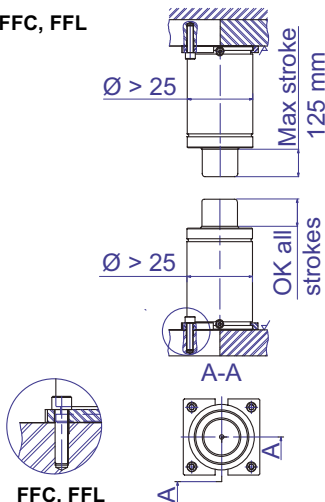

#### For: K-lug

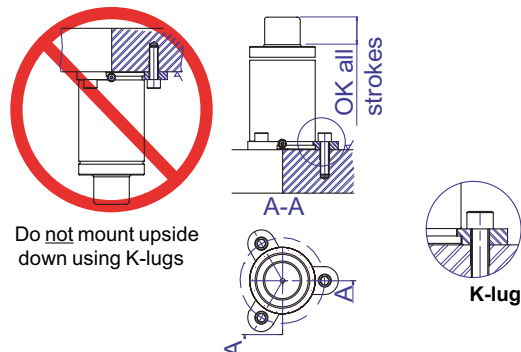

## Mounting method:

### Top mount (FC, FCS, FCX, FK, FCSC, FCR, FCSX)

#### Gas spring orientations:

Vertically upright = OK for all stroke lengths

Vertically upside down = OK up to 125 mm stroke (see **Warning!** below)

#### Cylinder hole clearance for cylinder diameters < Ø32

hole Ø = cylinder Ø + 0.5 to 1.0 mm

#### Cylinder hole clearance for cylinder diameters > Ø32

hole Ø = cylinder Ø + 0.5 to 2.0 mm


**Link systems:** FCSC is the preferred flange mount for linked systems as the gas spring is unable to rotate in the flange (see Note below).

**Note!** A small gap between flange halves is normal before the gas spring is clamped to the die using the mounting screws. Recent tolerance improvements between gas spring C-grooves and Top Mounts has, in some cases, eliminated the tendency for the gas spring to rotate within the flange. This now makes them more suitable for Link systems.


**Warning!** Depending on the stroke speed of the press, longer stroke gas springs are not generally recommended for upside down installations unless the FCSC flange mount is used. Top Mounts must never be installed in the die, whereby the mounting screws are required to support the full compression force of the gas spring when stroked (see below).




#### For: FC, FCS, FCX, FK, FCSC, FCSX

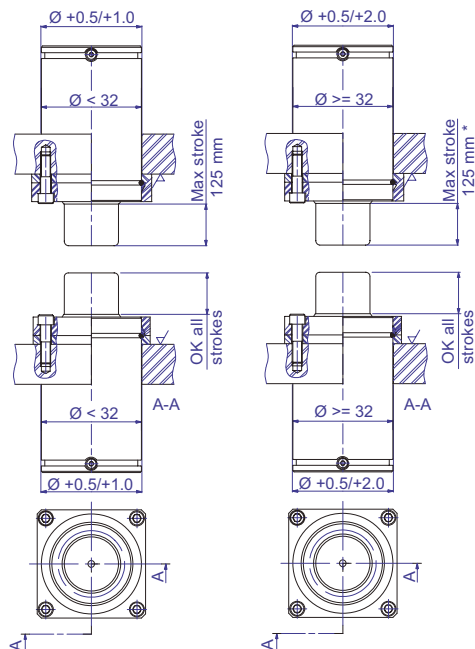

#### For: FCR

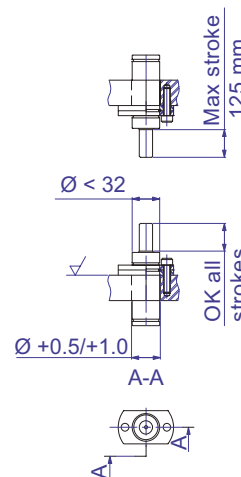

#### For: all Top mounts

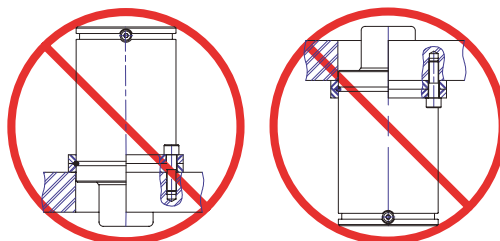

**Never** let the mounting screws support gas spring compression forces

\* **Note:** for the FCSC flange, upside down installation is OK for all stroke lengths

# Mounting Guidelines

## Mounting method: Thread mount (including FRM, FTM)

### Gas spring orientations:

Vertically upright = OK for all stroke lengths

Vertically upside down = OK for all stroke lengths


**Link systems:** it is possible to link thread mounted gas springs if there is sufficient access to the spring's charge port.

**Note!** It is important to always use the appropriate torque setting for the springs thread size when mounting the spring to the tool in order to prevent tool vibrations working the spring loose.


Use a dismountable thread locking compound and ensure that the compound do not touch the piston rod.



### For: EP, EPS

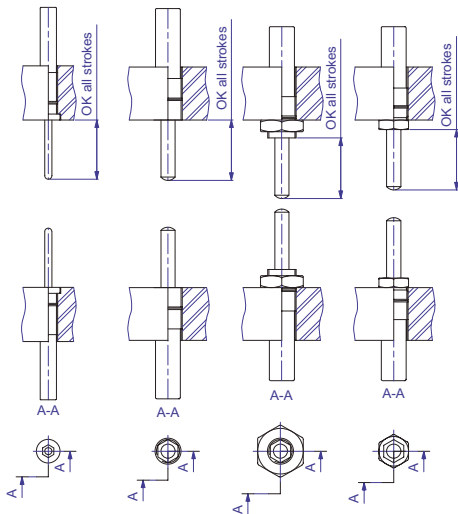

### For: FRM, FTM, TMS/XMS

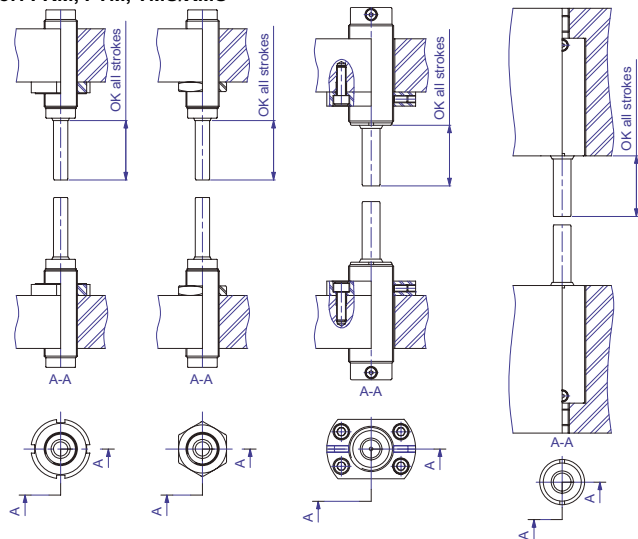



## Mounting method:

### Body mount (S, SM, HM, FAC, SA, HMF)


**Gas spring orientations:** suitable for all stroke lengths and all gas spring orientations from vertically upright through to upside down (see **Warning!** below).

**Key grooves:** Key-grooves should be used to either recess the Body Mount or to back up the Body Mount with an additional key, thus preventing gas spring compression forces exerting a shear stress on the mounting screws.



**Link systems:** this mounting method is very suitable for gas link systems, since the gas spring is unable to rotate.

#### Warning!

Always ensure the gas spring sits parallel with its mounting surface to minimise the risk of side loading.




#### For: FAC with SA

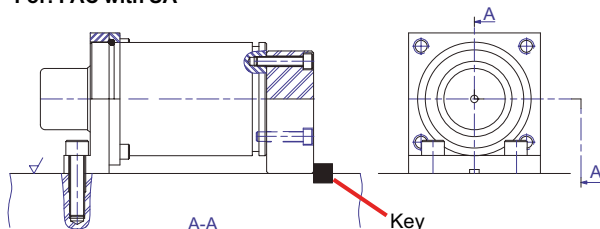


Always support the base of the gas spring when using an S or HMF mount

#### For: S, SM, HMF

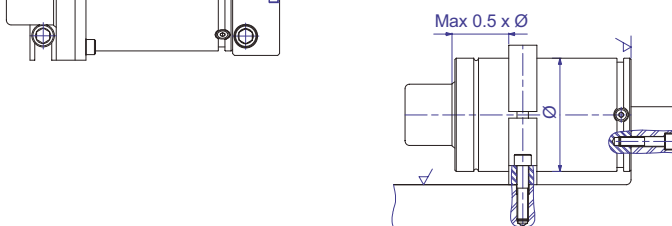

#### For: HM, HMF

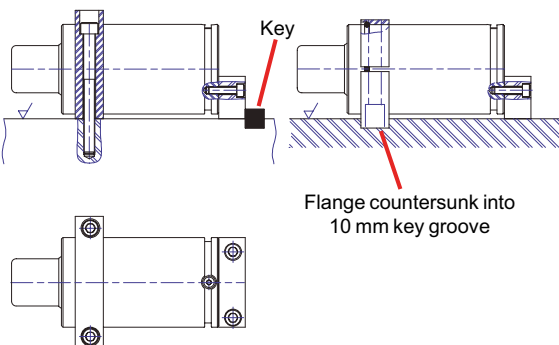

# The Safer Choice

Introduced in 1983, the KALLER gas spring technology quickly led to world-wide demand. The Safer Choice - Training, Safety and Reliability - has always been a KALLER top priority for providing the safer working environment. We recommend looking through all available KALLER features when selecting gas springs and gas or hose linked systems.



## KALLER Training Program

**TRAINING.** Without doubt the KALLER Training Program is the best and most creative way to fully understand and appreciate the importance of the safety and reliability features.



## PED approved for 2 million strokes

**RELIABILITY.** Our 2 million stroke PED approval ensures safer component cycle life.




## Flex Guide™ System

**RELIABILITY.** Prolongs service life, allows more strokes per minute, and offers greater tolerance to lateral tool movements.




## Dual Seal™ Link Systems

**RELIABILITY.** Fewer production interruptions due to leakage caused by vibration. Simplified installation thanks to the non-rotation feature.



## Overstroke Protection System

**SAFETY.** When a gas spring is overstroked, this helps reduce the risk of tool damage or injury.



## Overload Protection System

**SAFETY.** Jammed cam or tool part being forced by gas springs? This will help reducing such risks.



## Overpressure Protection System

**SAFETY.** Vents the spring if the internal gas pressure exceeds the maximum allowable limit to prevent accidents.