




D-Series

Bench Model Hydraulic Press

Our standard bench model C-frame presses are offered in sizes from 2-50 tons. Each press is built to last a lifetime.

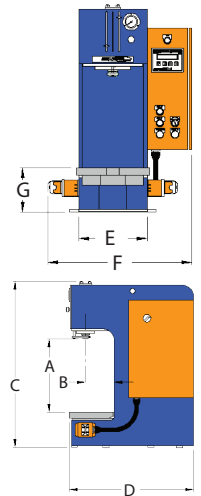

FEATURES

- Lifetime Frame Warranty
- Industry Standard Components
- Open Architecture controls
- Standard or Custom Frames
- High Speed
- Safety Compliant

D-Series Specifications

Model	D2-5M	D4-5M	D7-5M	D12-5M	D15-5M	D15-5HS	D25-5HS	D40-5HS
Tonnage	.5-2.7	1-4.7	1-7.4	2-12.4	3-18.8	3-18.8	5-29.5	7-42.4
Piston Diameter	1.5"	2.0"	2.5"	3.25"	4.0"	4.0"	5.0"	6.0"
Rod Diameter	1.0"	1.375"	1.75"	2.0"	2.5"	2.5"	3.5"	4.0"
Ram Speeds (IPM)	425/425/765	500/240/455	312/153/300	235/90/145	153/60/98	510/60/322	260/38/250	199/27/157
Pump Flow (GPM)	3.25	3.25	3.25	3.25	3.25	11	11	11
Operation PSI	150-3000	150-3000	150-3000	150-3000	150-3000	150-3000	150-3000	150-3000
Stroke (adjustable)	.5" -7.0"	.5" -7.0"	.5" -7.0"	.5" -7.0"	.5" -7.0"	.5" -7.0"	.5" -7.0"	.5" -7.0"
Motor HP/RPM	5/1800	5/1800	5/1800	5/1800	5/1800	5/1800	5/1800	5/1800
Reservoir Capacity	12 gallons	12 gallons	12 gallons	12 gallons	12 gallons	12 gallons	12 gallons	12 gallons
Weight	1000 lbs.	1000 lbs.	1000 lbs.	1000 lbs.	1260 lbs.	1400 lbs.	3800 lbs.	3800 lbs.
Daylight (A)	18"	18"	18"	18"	18"	18"	18"	18"
Throat (B)	7"	7"	7"	7"	7"	7"	7"	7"
Height (C)	43"	43"	43"	43"	46"	46"	53"	53"
Depth (D)	38"	38"	38"	38"	37.5"	41.50"	55.5"	55.5"
Frame Width (E)	13.5"	13.5"	13.5"	13.5"	14"	14"	22"	22"
Maximum Width (F)	30"	30"	30"	30"	31"	31"	36"	36"
Bolster (WxDxT)	14.5x11x1.5	14.5x11x1.5	14.5x11x1.5	14.5x11x1.5	15x12.25x1.5	15x12.25x1.5	23.5x17x2	23.5x17x2
Bolster to Base (G)	8.75"	8.75"	8.75"	8.75"	9.75"	9.75"	12.5"	12.5"

Note: Neff Press can custom design any of our D-Series presses

Making the Presses that Make the World Work


St. Louis, MO

neffpress.com


314-854-1200

Custom Options


- High speed power unit
- Automatic press cycles
- Feed integration packages
- Press guarding
- Preventative maintenance assistant
- HMI
- Footswitches
- Custom PLC controls
- Dwell timers
- Explosion proof
- CE/CSA/UL compliance
- Clean room compliance
- Speed controls
- Energy efficient hydraulics
- Heat exchangers

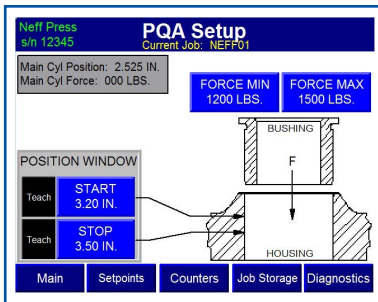

Force/Distance Monitoring

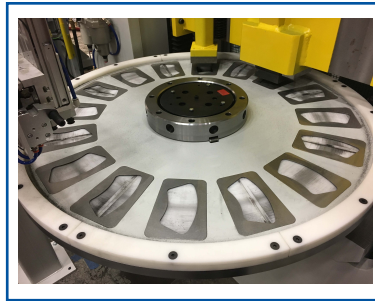


Indexers

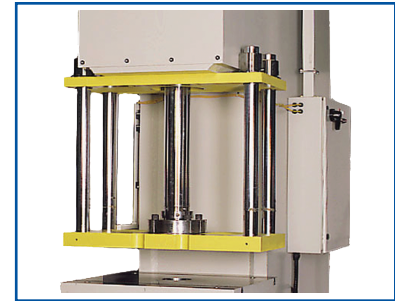


Guided tool mounting

Removable Bolsters


Note: All Dimensions shown are in inches.  = Neff's mounting holes

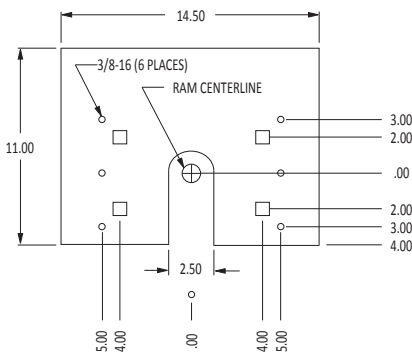

2-12 Ton

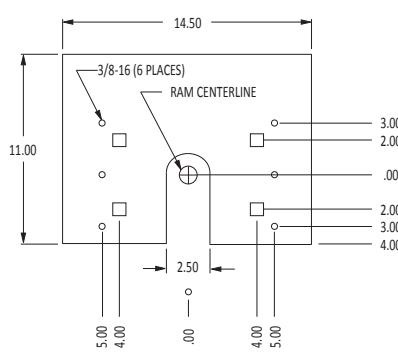


15 Ton

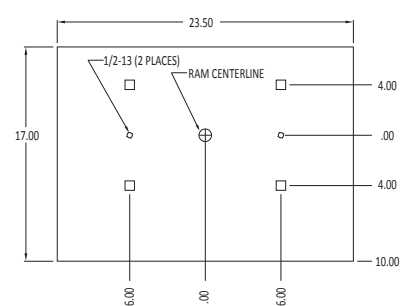

25-40 Ton

Quick Die Change System

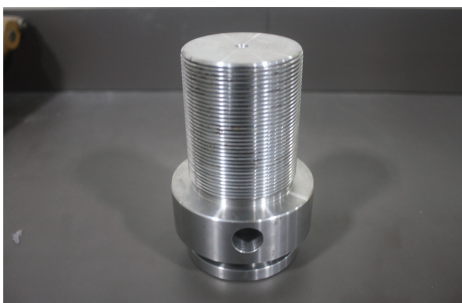

Die Connector Stud



Die Connector Ring



Example