

FACILITY MAINTENANCE



SPEED BUMPS & CAR STOPS



INDUSTRIAL FANS



FLOOR TAPE APPLICATORS



PICNIC TABLES & BENCHES



BUILDINGS & SHELTERS





INDUSTRIAL & COMMERCIAL SIGNAGE

_		
	Speed Bumps & Car Stops @	46-49
	Expand-A-Gates	51
	Industrial Fans & Air Conditioners @	
	Heaters	54-56
	Magnetic & Brush Sweepers	56-57
	Floor Tape Applicators	
	Acrylic Convex Mirrors @	59
	Picnic Tables & Benches &	60-61
	Trash Receptacles	62-63
	Bicycles & Bicycle Racks 👀	65
	Hose Reels &	66-67
	Warning Sirens	67
	Buildings & Shelters 🐠	68-69
	Storage Lockers	70-71
	Fuel Pumps @	71-72
	Sign Bases 👧 💮	73
	Industrial & Commercial Signage	

SAFETY SIGNIDEAS



model YGR-LO-10-SI*



model BOL-SQ-42-4-SI



model LPRO-48-9-4-SI



model HRAIL-9072-SI*



- Size: 96"L x 42"H x 21" Midrail
- Powder Coat Finish
- · Sockets Sold Separately

model VDKR-8-SI



- Post Size: 42"H x 4.5"D
- Chain Length: 127"
- Removable Chain
- Powder Coat Finish

model DCBB-42-4.5-SI



model CG-42-SI



model BOL-MB-42-5.5-SI**



- Adhesive Floor Decal
- Decal Size: 36"W x 36"L
- · Place in Front of Electrical Panels
- Custom artwork available

model SI-FD-10100



- (1) 48"L Drop-In Guard Rail
- (2) 18"H Posts
- Powder Coat Finish

model ST-GR-4-SI*



model ADKR-8-SI



model GGR-B-8-SI*

- All signs are made of aluminum composite. Material is comprised of two pre-painted sheets of 0.130" aluminum with a solid polyethylene core. Ideal for both indoor and outdoor use.
- Signs measure 14½" wide by 10½" high.
- Customize the sign text to meet your specification.
- Signs are manufactured with ultraviolet inks and anti-grafitti coating.
- Each sign includes predrilled holes and hardware.

*Sold in bundles. **Utilizes adhesive label.



model HPRO-M-36-36-2-SI



model TEGC-24-36-2-SI



model PRAIL-102-Y-SI



model JBOL-36-12-SI**



model HPRO-48-42-4-SI



model BCD-7636-OR-SI



model GR-D-8-PC-YEL-SI*



model SQ-72-SI



model BOL-42-4.5-SI**



model PREG-42-SI



model BOL-FD-36-Y-SI



model CGP-36-SI



Rumble Strips

A good and audible warning for motorists. These strips have a unique raised dot grip system, and special grooves for improved adhesion and made from a specially formulated glass-filled polymer material. This material is also UV stabilized and cold weather impact protected. Rumble strips can be permanently (epoxy) mounted.

MODEL Number	OVERALL SIZE (W x L x H)	COLOR	QUANTITY	WEIGHT (POUND)
RMBS-24-Y	4" x 24" x ½"	YELLOW	1	12
RMBS-24-O	4" x 24" x ½"	ORANGE	1	12
RMBS-24-W	4" x 24" x ½"	WHITE	1	12
RMBS-ER	EPOXY RESIN, 2 G	EPOXY RESIN, 2 GALLON KIT (installs 30 units)		



model HDPB-18-Y





model HDPB-BT

model HDPB-ER

Heavy-Duty Parking Blocks / Speed Bumps

These are a guidance device that provides a physical deterrent or warning for motorists. Ideal for traffic calming, work zones, garages, edge drop off markings, bicycle lanes, parking lots, light rail, and driveways. Durable polymer material is chemical and weather resistant, which outlasts concrete and rubber products. Unique groove system provides easy installation and improved adhesion for epoxy glues. Bolt holes are provided for additional anchoring if needed. Units can be permanently (epoxy) or temporarily (butyl tape) mounted.


	MODEL Number	OVERALL SIZE (W x L x H)	COLOR	QUANTITY	WEIGHT (POUND)	
	HDPB-18-W	8" x 18" x 1½"	WHITE	1	5	
T	HDPB-18-Y	8" x 18" x 1½"	YELLOW	1	5	
	HDPB-ER	EPOXY RESIN, 2 G	EPOXY RESIN, 2 GALLON KIT (installs 30 units)			
L	HDPB-BT	BUTYL PAD 3/16" x	BUTYL PAD 3/16" x 8" x 8"			

Steel Dome Markers

Provide visible lane indication with these rugged Steel Dome Markers. Each unit has a pre-drilled hole in each corner for easier application. Mounting holes are ½" in diameter. Hardware sold separately.

MODEL Number	OVERALL SIZE (W x L x H)	DOME DIAMETER	CARTON Quantity	FINISH	WEIGHT (POUND)
DSB-6Y®	7" x 7" x 2½"	5½"	6	POWDER COAT	12
AS-383-4PK®	3/8" x 3" PA	3/8" x 3" PACKAGE OF FOUR CONCRETE ANCHORS			





Raised Pavement Markers

These Pavement Markers serve as a physical and audible warning for motorists. Manufactured of polypropylene and uses the raised hexagon pattern to increase strength and adhesive surface area. Units can be permanently (epoxy) or temporarily (butyl tape) mounted.

MODEL	DOME	DOME		WEIGHT	
NUMBER	DIAMETER	HEIGHT	COLOR	(POUND)	
RPM-4-W	4"	3/4"	WHITE	1	
RPM-4-Y	4"	3/4"	YELLOW	1 1	
RPM-4-B	4"	3/4"	BLACK	1	
RPM-ER	EPOXY RESII	EPOXY RESIN, 2 GALLON KIT (installs 200 units)			
RPM-BT	BUTYL PAD 3	BUTYL PAD 3/16" x 8" x 8"			







Molded Rubber Speed Bumps


Heavy-duty molded rubber construction for durability. Rubber includes UV stabilizer for longer life. Features five reflective yellow diagonal strips and "cats eyes" per side for better visibility. Four mounting holes per speed bump with one mounting hole per end cap, hardware included. Maximum capacity is 40,000 pounds.

MODEL Number	OVERALL SIZE (W x L x H)	ТҮРЕ	TYPE OF HARDWARE KIT INCLUDED	WEIGHT (POUND)
SBRY-72-C [®]	11¾" x 72" x 1¾"	SPEED BUMP	CONCRETE	53
SBRY-CAP-C®	11¾"W x 11¾"L	END CAPS	CONCRETE	16
SBRY-72-A®	11¾" x 72" x 1¾"	SPEED BUMP	ASPHALT	55
SBRY-CAP-A®	11¾"W x 14½"L	END CAPS	ASPHALT	17

Speed Bumps

Help control drivers in dangerous, areas while protecting people and property. One person installation. Can be removed for seal coating, snow removal, or change of location. Resists marring by oil, road salt, sunlight, and chemicals. Feature dual 1"W x ¾"H cable channels and includes hardware. Constructed of lightweight recycled plastic. Compression strength is 3,200 pounds per square inch. The concrete hardware kit includes bolts, anchors, and washers. Asphalt kit includes spikes and butyl tape. The HD asphalt kit includes anchors and bolts. The HD anchor should be epoxied (epoxy not included) into the ground and then the speed bump is secured to that anchor with a bolt. The glue down anchor plate kit includes anchor plates, T-nuts, bolts, and washers. Requires 2-3 ounces of either 2-part epoxy or heavy duty construction adhesive to the bottom of each anchor plate, which is not included.

MODEL Number	OVERALL SIZE (W x L x H)	TYPE OF HARDWARE KIT INCLUDED	NUMBER OF MOUNTING HOLES	WEIGHT (POUND)
SB-48®	10" x 48" x 2"	CONCRETE	3	17
SBA-48®	10" x 48" x 2"	ASPHALT	3	19
SBHA-48	10" x 48" x 2"	HD ASPHALT	3	19
SBG-48®	10" x 48" x 2"	GLUE-DOWN	3	17
SBD-48*®	12" x 48" x 2¼"	CONCRETE	3	26
SBDA-48*⊛	12" x 48" x 2¼"	ASPHALT	3	29
SBDHA-48*	12" x 48" x 2¼"	HD ASPHALT	3	29
SBDG-48*®	12" x 48" x 2¼"	GLUE-DOWN	3	26
SB-36⊛	10" x 72" x 2"	CONCRETE	4	26
SBA-36⊛	10" x 72" x 2"	ASPHALT	4	29
SBHA-36	10" x 72" x 2"	HD ASPHALT	4	28
SBG-36 [®]	10" x 72" x 2"	GLUE-DOWN	4	26
SBD-72®	12" x 72" x 21⁄4"	CONCRETE	4	37
SBDA-72®	12" x 72" x 2¼"	ASPHALT	4	40
SBDHA-72	12" x 72" x 2¼"	HD ASPHALT	4	40
SBDG-72®	12" x 72" x 2¼"	GLUE-DOWN	4	37
SB-108®	10" x 106" x 2"	CONCRETE	5	56
SBA-108®	10" x 106" x 2"	ASPHALT	5	59
SBHA-108	10" x 106" x 2"	HD ASPHALT	5	59
SBG-108®	10" x 106" x 2"	GLUE-DOWN	5	56
SBS-1012®	REFLECT	TIVE SPEED BUMP S	IGN	2
SBE-12**	END CAPS FO	R STANDARD SPEED	BUMPS	9



^{**}End caps only work with 10" W x 2" H sized speed bumps See additional anchor kits below.













CAUTION SPEED BUMPS

REFLECTIVE SPEED BUMP SIGN model SBS-1012

SBD-48, SBDA-48, SBDHA-48, & SBDG-48 do not have cable channels.

Speed Bump Anchor Kits

The Anchor Kits are a great addition to the facility maintenance department. The kit supplies a solution to securing speed bumps to a surface. The unit is designed of a strong construction that is resilient and long lasting throughout the harshest environments. Once the anchoring is in place, the speed bumps are ready for use. The kit is available in both glue down and asphalt anchor style.

SPEED BUMP OPTION	SPEED BUMP OPTIONS					
MODEL Number	DESCRIPTION	USE WITH # OF Holes	WEIGHT (POUND)			
SB-48-AK	ASPHALT KIT FOR 48 MODELS	3	4			
SB-36-AK	ASPHALT KIT FOR 36 MODELS	4	4			
SB-108-AK	ASPHALT KIT FOR 108 MODELS	5	5			
SB-HD-AK-3	HEAVY DUTY ASPHALT HARDWARE KIT	3	7			
SB-HD-AK-4	HEAVY DUTY ASPHALT HARDWARE KIT	4	9			
SB-HD-AK-5	HEAVY DUTY ASPHALT HARDWARE KIT	5	10			
SB-48-GDK	GLUE DOWN KIT FOR 48 MODELS	3	2			
SB-36-GDK	GLUE DOWN KIT FOR 36 MODELS	4	3			
SB-108-GDK	GLUE DOWN KIT FOR 108 MODELS	5	3			



model SB-72-AK




model SB-48-GDK




Rubber Speed Humps

The Rubber Speed Humps control traffic and reduce vehicle speeds. Ideal in neighborhoods, construction areas, hospitals, post offices, and airports. Can be removed for seal coating, snow removal, or change of location. Easy tongue and groove installation. Constructed of recycled and virgin rubber. Unit is black with yellow embedded highway tape to ensure high visibility. Complete modules include (5) five middle and (2) two end sections.










model RSH-108-EF-C FEMALE END CAP

model RSH-108-EM-C MALE END CAP

model RSH-108-M-A MIDDLE SECTION

MODEL	OVERALL SIZE		TYPE OF HARDWARE	UNIFORM	REDUCE	WEIGHT
NUMBER	(W x L x H)	DESCRIPTION	KIT INCLUDED	CAPACITY	SPEEDS (MPH)	(POUND)
DELUXE RUBBER SPEE	D HUMPS					
RSH-108-24-C⊛	23 ¹ / ₂ " x 108" x 1 ³ / ₈ "	COMPLETE MODULE	CONCRETE	40,000 lb.	5-10	185
RSH-108-24-A⊛	23 ¹ / ₂ " x 108" x 1 ³ / ₈ "	COMPLETE MODULE	ASPHALT	40,000 lb.	5-10	194
RSH-120-36-C⊛	35 ¹ / ₄ " x 120" x 2 ⁷ / ₁₆ "	COMPLETE MODULE	CONCRETE	60,000 lb.	5-10	332
RSH-120-36-A⊛	35 ¹ / ₄ " x 120" x 2 ⁷ / ₁₆ "	COMPLETE MODULE	ASPHALT	60,000 lb.	5-10	346
ADDITIONAL PIECES						
RSH-108-EF-C [®]	23 ¹ / ₂ " x 8 ⁷ / ₈ " x 1 ³ / ₈ "	END CAP (female)	CONCRETE	40,000 lb.	5-10	12
RSH-108-EF-A®	23 ¹ / ₂ " x 8 ⁷ / ₈ " x 1 ³ / ₈ "	END CAP (female)	ASPHALT	40,000 lb.	5-10	12
RSH-108-EM-C⊛	$23^{1/2}$ " x $9^{15/32}$ " x $1^{3/8}$ "	END CAP (male)	CONCRETE	40,000 lb.	5-10	12
RSH-108-EM-A⊛	23 ¹ / ₂ " x 9 ¹⁵ / ₃₂ " x 1 ³ / ₈ "	END CAP (male)	ASPHALT	40,000 lb.	5-10	12
RSH-108-M-C®	23 ¹ / ₂ " x 19 ³ / ₁₆ " x 1 ³ / ₈ "	MIDDLE SECTION	CONCRETE	40,000 lb.	5-10	23
RSH-108-M-A®	23 ¹ / ₂ " x 19 ³ / ₁₆ " x 1 ³ / ₈ "	MIDDLE SECTION	ASPHALT	40,000 lb.	5-10	23
RSH-120-EF-C®	35 ¹ / ₄ " x 10 ⁷ / ₁₆ " x 2 ⁷ / ₁₆ "	END CAP (female)	CONCRETE	60,000 lb.	5-10	22
RSH-120-EF-A®	35 ¹ / ₄ " x 10 ⁷ / ₁₆ " x 2 ⁷ / ₁₆ "	END CAP (female)	ASPHALT	60,000 lb.	5-10	22
RSH-120-EM-C⊕	35 ¹ / ₄ " x 11 ³ / ₁₆ " x 2 ⁷ / ₁₆ "	END CAP (male)	CONCRETE	60,000 lb.	5-10	22
RSH-120-EM-A⊛	35 ¹ / ₄ " x 11 ³ / ₁₆ " x 2 ⁷ / ₁₆ "	END CAP (male)	ASPHALT	60,000 lb.	5-10	22
RSH-120-M-C⊛	35 ¹ / ₄ " x 20 ⁵ / ₁₆ " x 2 ⁷ / ₁₆ "	MIDDLE SECTION	CONCRETE	60,000 lb.	5-10	56
RSH-120-M-A®	35 ¹ / ₄ " x 20 ⁵ / ₁₆ " x 2 ⁷ / ₁₆ "	MIDDLE SECTION	ASPHALT	60,000 lb.	5-10	56

48 Hours



Rubber Speed Hump Anchor Kits

The Anchor Kits are a great addition to the facility maintenance department. The kit supplies a solution to securing speed bumps to a surface. The unit is designed of a strong construction that is resilient and long lasting throughout the harshest environments. Once the anchoring is in place, the speed bumps are ready for use. The kit is available in both glue down and asphalt anchor style.


RUBBER SPEED HUMP OPTIONS					
MODEL Number	DESCRIPTION	USE WITH LENGTH	WEIGHT (POUND)		
RSH-108-HD-AK-KIT	HEAVY DUTY ASPHALT HARDWARE KIT	108	12		
RSH-120-HD-AK-KIT	HEAVY DUTY ASPHALT HARDWARE KIT	120	14		
RSH-GD-16	GLUE DOWN HARDWARE KIT	108	22		
RSH-GD-24	GLUE DOWN HARDWARE KIT	120	30		

Car Stops

Protect people and property from drivers in dangerous areas. Constructed of lightweight recycled plastic. One person installation. Can be removed for seal coating, snow removal, or change of location. Resists marring by oil, road salt, sunlight, and chemicals. Resists rotting, termite damage, and corrosion. No costly painting or maintenance. Asphalt kit includes spikes and butyl tape. The concrete hardware kit includes bolts, anchors, and washers. The glue down anchor plate kit includes anchor plates, T-nuts, bolts, and washers. Requires 2-3 ounces of 2-part epoxy to the bottom of each anchor plate, which is not included. Hardware kits sold separately. Models included in the CS-TB96 series are designed for use with trucks and other larger tired vehicles.

Model CS-33-BL is made of black, recycled rubber.

MODEL Number	OVERALL SIZE (W x L x H)	COLOR	NUMBER OF Mounting Holes	WEIGHT (POUND)
CS-33-G _☉	6" x 72" x 31/4"	GRAY	3	27
CS-33-Y®	6" x 72" x 3¼"	YELLOW	3	27
CS-33-B®	6" x 72" x 3¼"	BLUE	3	27
CS-33-W⊕	6" x 72" x 3¼"	WHITE	3	27
CS-33-BL®	5¾" x 71¾" x 4"	BLACK & YELLOW	4	37
CS-S24-G⊚	6" x 24" x 31/4"	GRAY	2	10
CS-S24-Y®	6" x 24" x 3¼"	YELLOW	2	10
CS-S24-B⊛	6" x 24" x 3¼"	BLUE	2	10
CS-S24-W®	6" x 24" x 31/4"	WHITE	2	10
CS-S48-G®	6" x 48" x 4"	GRAY	2	22
CS-S48-Y⊛	6" x 48" x 4"	YELLOW	2	22
CS-S48-B⊚	6" x 48" x 4"	BLUE	2	22
CS-S48-W⊛	6" x 48" x 4"	WHITE	2	22
CS-S72-G [®]	6" x 72" x 4"	GRAY	3	33
CS-S72-Y [®]	6" x 72" x 4"	YELLOW	3	33
CS-S72-B⊙	6" x 72" x 4"	BLUE	3	33
CS-S72-W⊛	6" x 72" x 4"	WHITE	3	33
CS-TB96-G _☉	10" x 96" x 7"	GRAY	4	134
CS-TB96-Y®	10" x 96" x 7"	YELLOW	4	134
CS-TB96-B®	10" x 96" x 7"	BLUE	4	134
CS-TB96-W®	10" x 96" x 7"	WHITE	4	134





CAR STOP OPTIONS			
MODEL NUMBER	DESCRIPTION	USE WITH ABOVE NO. Of Mounting Holes	WEIGHT (POUND)
CS-AK-2®	ASPHALT HARDWARE KIT	2	3
CS-HD-AK-2	HEAVY DUTY ASPHALT HARDWARE KIT	2	2
CS-33-KIT-2®	CONCRETE HARDWARE KIT	2	2
CS-GD-2⊕	GLUE DOWN ANCHOR PLATE	2	2
CS-AK-3®	ASPHALT HARDWARE KIT	3	4
CS-HD-AK-3	HEAVY DUTY ASPHALT HARDWARE KIT	3	3
CS-33-KIT-3®	CONCRETE HARDWARE KIT	3	2
CS-GD-3⊕	GLUE DOWN ANCHOR PLATE	3	3
CS-AK-4®	ASPHALT HARDWARE KIT	4	4
CS-HD-AK-4	HEAVY DUTY ASPHALT HARDWARE KIT	4	4
CS-33-KIT-4®	CONCRETE HARDWARE KIT	4	2
CS-GD-4⊕	GLUE DOWN ANCHOR PLATE	4	3

Heavy Duty Asphalt Anchors

The Heavy Duty Asphalt Anchors are ideal for attaching items to an asphalt surface. The unit is designed of a strong construction that is resilient and long lasting throughout the harshest of environments. Once the anchors are in place, they promote safety and well-being by holding material in a secure position.

MODEL Number	SHAFT DIAMETER	OVERALL Diameter	OVERALL Length	QUANTITY	WEIGHT (POUND)
AS-HDA-12	1"	1 ⁵ /8"	12"	1	1
AS-HDA-12-4PK	1"	1 ⁵ /8"	12"	4	4
AS-HDA-12-6PK	1"	1 ⁵ /8"	12"	6	6









to Ship

CONCRETE KIT model CS-33-KIT-3



GLUE DOWN KIT model CS-GD-2



AS-HDA-12-6PK



model CLB-5-78L

Clearance Bars

Clearance Bars are low maintenance, highly visible, and simple to read. These easy to install clearance bars are made of ¼" nominal wall lo-density polyethylene. Comes with eye hooks attached, chain not included. Standard lettering is "CLEARANCE" and specified height. Other colors and specified lettering available, contact factory.

MODEL Number	OUTSIDE Diameter	LENGTH	LETTERING	COLOR	WEIGHT (POUND)
CLB-5-78P	5¼"	78"	NO	YELLOW	15
CLB-5-78L	5¼"	78"	YES	YELLOW	15
CLB-7-110P	7½"	110"	NO	YELLOW	20
CLB-7-110L	7½"	110"	YES	YELLOW	20

ECONOMY WARNING BARRIER • model ODG-121-F

Overhead Door Warning Barriers



Protect overhead doors from fork truck damage. Heavy-duty PVC construction is lightweight and will not rust. Highly visible black and yellow safety stripes and two American flags serve as a visual warning. Includes two 15' long chains with quick connects to hang barrier from ceiling or existing overhead door track.


Model ODG-133-BL features built-in warning sirens and flashing lights that activate when the barrier is bumped or contacted. Provides an audible and visual warning before damage to overhead door is caused. 76 DB at 9 feet. Requires (4) four 9V lithium batteries, not included.


MODEL Number	DESCRIPTION	OVERALL LENGTH	WEIGHT (POUND)
ODG-121-F⊕	ECONOMY WARNING BARRIER	120"	63
ODG-133-BL⊛	DELUXE WARNING BARRIER	120"	66



DELUXE WARNING BARRIER • model ODG-133-BL

Modular Guard Curbs





model MPG-E

model MPG-C

MODEL Number	STYLE	OVERALL SIZE (L x D x H)	BOLT Holes	NET WT. (POUNDS)
MPG-C	CENTER SECTION	21¼" x 6" x 5"	2	13
MPG-E	END SECTION	21¼" x 6" x 5"	2	13
MPG-T	T-SECTION	12" (8¾"L) x 6" x 5"	1	11
MPG-L	L-SECTION	8¾" (8¾") x 6" x 5"	1	8
MPG-ABK-1	CONCRETE ANCHOR	KIT (FOR MPG-T & MPG-L)	0.5
MPG-ABK-2	CONCRETE ANCHOR	KIT (FOR MPG-C & MPG-E	:)	1





Manhole Guard Rail

The manhole guard rail is perfect for utility maintenance and city officials. The simple set up and take down promotes quick use when on the go and a compact storage when not in use. High rails and an attaching chain limit access and promote safety to the worker in the enclosed area. A brightly colored high strength construction makes the unit highly visible, giving caution to pedestrians and other workers to keep their distance.

MODEL	OVERALL SIZE	USABLE SIZE	WEIGHT
NUMBER	(W x L x H)	(W x L)	(POUND)
MHGR-32	33 ⁵ /8" x 32 ⁵ /8" x 44 ¹ /8"	31" x 30"	105

Expand-A-Gates

Designed to set up quickly and easily wherever and whenever they are needed. Ideal for preventing potential accidents. Lightweight design allows personnel to quickly retrieve the gate and limit access to unsafe areas. Smooth operating scissor action. Interlocking and nestable. Suffix -C features casters. Suffix -W features one swivel caster with a wall/rack mounting kit. Model PEXGATE is constructed of heavy-duty molded yellow and black plastic. One side of gate includes reflectors for better visibility. End pieces are hollow and may be filled with liquid for added weight. Assembly required.








MODEL Number	OVERALL Collapsed Width	EXPANDED Gate Width	*OVERALL Height	WEIGHT (POUND)
STEEL CONSTRUCTION				
EXGATE-30®	19¾"	139"	38"	55
EXGATE-30-C⊚	19¾"	139"	401/8"	57
EXGATE-30-W [®]	205/16"	139"	385/16"	61
EXGATE-W-KIT		WALL MOUNT KIT		5
ALUMINUM CONSTRUCTION				
ALEXGATE-30®	19¾"	139"	38"	25
ALEXGATE-30-C⊛	19¾"	139"	401/8"	30
ALEXGATE-30-W _☉	205/16"	139"	385/16"	34
ALEXGATE-W-KIT		5		
PLASTIC CONSTRUCTION				
PEXGATE-30 [®]	11½"	122"	38"	12
PEXGATE-30-C®	11½"	122"	40¾"	13





model ALEXGATE-30-C

*OVERALL HEIGHT WHEN COLLAPSED








Connector for wall mounted unit



Plastic unit is easy to fill for added weight





Industrial Duty Circulator Fans (115V 1-PHASE STANDARD)

Two speed, 115V, 1 phase, ball bearing, totally enclosed and permanently lubricated Industrial Duty Circulator Fan. Pull chain switch with a 12 foot long cord and an SJT type 3 conductor cord. Meets OSHA standards and is ETL C/US listed. 1/4 HP electric motor.

MODEL Number	BLADE Diameter	MOUNTING Style	AMPS High	CFM HIGH	CFM LOW	WEIGHT (POUND)
ICRF-24-P	24"	PEDESTAL	2.5	6800	5000	75
ICRF-24-W	24"	WALL	2.5	6800	5000	45
ICRF-30-P	30"	PEDESTAL	2.7	7900	6000	75
ICRF-30-W	30"	WALL	2.7	7900	6000	48
OSCILLATING ST	YLE					
ICRF-24-PO	24"	PEDESTAL	2.5	6800	5000	79
ICRF-24-WO	24"	WALL	2.5	6800	5000	49
ICRF-30-PO	30"	PEDESTAL	2.7	7900	6000	78
ICRF-30-WO	30"	WALL	2.7	7900	6000	53





Work Station Fans 115V 1-PHASE STANDARD

Three speed, 115V, 1 phase, totally enclosed, permanently lubricated motor Work Station Fan. Mount with one bolt or lag screw to walls, ceilings, work benches, machines or any surface. Pull chain switch on a 10 foot long SJT type 3 conductor cord. Meets OSHA standards and is ETL C/US listed.

MODEL Number	BLADE Diameter	MOUNTING Style	AMPS High	CFM High	CFM MED	CFM LOW	WEIGHT (POUND)
WSF-12	12"	WALL	1.1	1650	1420	1120	17
WSF-18	18"	WALL	2.2	4600	4200	3200	26
WSF-18-F	18"	FLOOR	1.5	4600	4200	3200	23



High Performance Circulator Fans 115V 1-PHASE STANDARD

Two speed, 115V, 1 phase, ball bearing, totally enclosed, and permanently lubricated Industrial Duty Circulator Fan. Pull chain switch with a 12 foot long SJT type 3 conductor cord. Meets OSHA standards and is ETL C/US listed. 1/3 HP electric motor.

	MODEL Number	BLADE Diameter	MOUNTING Style	AMPS High	CFM High	CFM LOW	WEIGHT (POUND)
	HPCR-30-P	30"	PEDESTAL	3.4	8200	6200	75
	HPCR-30-W	30"	WALL	3.4	8200	6200	48
	HPCR-30-I	30"	I-BEAM	3.4	8200	6200	51
;	HPCR-30-C	30"	CEILING	3.4	8200	6200	48



Portable Work Station Fan 115V 1-PHASE STANDARD

The three (3) speed, ball bearing, Portable Work Station Fan is totally enclosed and permanently lubricated. This fan has a rotary switch, 360° tilting head, 10 foot long SJT type 2 conductor cord, and coated steel guard. Steel hub/spider aluminum paddle blades and meets OSHA standards. Overall size is 25"W x 27"L x 53"H. ETL C/US listed.

MODEL	BLADE	MOUNTING	CFM	CFM	CFM	WEIGHT
Number	Diameter	Style	HIGH	Medium	LOW	(POUND)
PWSF-18H-TE	18"	PEDESTAL	4600	4200	3200	35



Shutter Mounted Exhaust Fans 115V 1-PHASE STANDARD

Inside-building installation only with vents outside. Eliminate need for external framing and shutter. Ideally suited for thin wall buildings. Units are 115V, 1 phase totally enclosed and permanently lubricated. Pull chain switch. No cord. Junction box provided for direct wiring. Meets OSHA standards.

MODEL Number	BLADE Diameter	MOTOR HP	AMPS High	CFM High	CFM MED	CFM LOW	WEIGHT (POUND)
SME-12	12"	1/12	1.1	825	710	560	16
SME-18	18"	1/8	2.2	2300	2100	1850	25
SME-24	24"	1/4	2.5	3400		2770	41
SME-30	30"	1/4	2.7	3950		3080	50



model DDB-36

Direct Drive Portable Blower 115V 1-PHASE STANDARD

The two speed, 115V, 1 phase, ball bearing, Portable Blower has a totally enclosed motor. The fan also features 3 paddle style steel blades and 8" rubber wheels. It has a rocker switch with a 15' SJT type 3 conductor power cord. Meets OSHA standards. ETL C/US listed.

MODEL	BLADE	RPM	AMP	CFM	CFM	WEIGHT
NUMBER	DIAMETER	HIGH	HIGH	HIGH	LOW	(POUND)
DDB-36	36"	1100	5.5	12500	9000	110

Commercial Circulator Fans 115V 1-PHASE STANDARD

Two speed, 115V, 1 phase, ball bearing Commercial Circulator Fan. Pull chain switch with a 9 foot long cord and an SJT type 3 conductor cord. Meets OSHA standards and is UL listed. ¼ HP electric motor. These Circulator Fans do not have a totally enclosed motor. They should be used in a clean and dry commercial application.

MODEL Number	BLADE Diameter	MOUNTING Style	AMPS High	CFM HIGH	CFM LOW	WEIGHT (POUND)
CCRF-24-P	25"	PEDESTAL	2.3	5400	4300	63
CCRF-24-W	25"	WALL	2.3	5400	4300	43
CCRF-30-P	30"	PEDESTAL	2.4	6000	4800	66
CCRF-30-W	30"	WALL	2.4	6000	4800	46



Commercial Belt Drive Portable Blower 115V 1-PHASE STANDARD

The two speed, ball bearing Commercial Circulator Fan is pull chain. Meets OSHA standards and is UL C/US listed. This fan does not have a totally enclosed motor and should be used in a clean and dry commercial application. Features 8 foot long SJT type 3 conductor cord and 8" rubber wheels.

MODEL	BLADE	AMP	CFM	CFM	WEIGHT
Number	Diameter	High	High	LOW	(POUND)
DDB-C-42	42"	6.5	13500	11000	93



Commercial Direct Drive Blowers (115V 1-PHASE STANDARD)

Two speed, 1/3 HP, 115V, 1 phase, ball bearing motor, permanently lubricated. Rocker switch (MB-C-30) or rotary switch (MB-RS-C-36) standard. 6 foot long SJT type 3 conductor cord. Meets OSHA standards and is UL listed. These Direct Drive Blowers do not have a totally enclosed motor. They should be used in a clean and dry commercial application.

MODEL	BLADE	AMPS	CFM	CFM		WEIGHT
NUMBER	DIAMETER	HIGH	HIGH	LOW	TYPE	(POUND)
MB-C-30	30"	3.6	6300	5500	SWIVEL	60
MB-RS-C-36	36"	3.6	8200	7000	STATIONARY	70



Commercial Floor Fans 115V 1-PHASE STANDARD

Three speed, 115V, 1 phase, permanently lubricated motor, with rotary switch and 7 foot long SJT type 3 conductor cord. Meets OSHA standards and is UL listed. These floor fans do not have a totally enclosed motor. They should be used in a clean and dry commercial application.

MODEL Number	BLADE Diameter	MOTOR HP	CFM High	CFM MED	CFM LOW	WEIGHT (POUND)
FF-C-12	12"	1/12	2100	1750	1500	10
FF-C-20	20"	1/5	3450	3100	2950	18



Industrial Ceiling Fans (115V 1-PHASE STANDARD)

Lower winter heating costs by recovering residual heat trapped at roof level. Fully assembled except blade bolt down, 3 conductor power cord is 3 foot long with plug. All metal construction, with white epoxy finish and aluminum paddles. Fan has 18" down rod with safety cable. Speed controls and reversion switches available, please contact factory.

MODEL Number	ТҮРЕ	SIZE	VOLTAGE / PHASE	CFM	WEIGHT (POUND)
ICF-48	DOWN DRAFT	48"	115V, 1PH	17000	13
ICF-56	DOWN DRAFT	56"	115V, 1PH	21000	17
ICF-56-R	REVERSIBLE	56"	115V, 1PH	21000	16





TS-EVAP-36

Heavy-Duty Portable Evaporative Coolers (115V 1-PHASE STANDARD)

These Portable Evaporative Coolers have large internal water reservoirs that allow units to operate approximately 8 hours without being connected to an external water source. Water is supplied to the internal tank from a standard 3/4" water hose or from optional water tank. Water level in internal tank is controlled by the unit's float valve. Maintenance free submersible water pump. 8" thick evaporative media pads are easily accessible for routine maintenance. Roto-molded corrosion free polyethylene housing. 20 foot long, 16 ga. 3 conductor cord with GFCI plug. Thermally protected, permanently lubricated fan motor. Variable speed / 2 speed on 48" unit. Weather tight fan and pump control switches. 4" heavy-duty casters; two (2) locking, two (2) non-locking. ETL listed.

MODEL Number	BLADE SIZE	MOTOR HP	UNIT AMPS	CFM	EFFECTIVE SQ. FEET	INTERNAL WATER TANK	OVERALL SIZE (W x L x H)	WEIGHT (POUND)
TS-EVAP-16	16"	0.5	4.6	2500/3300/3900	900	42 gal.	38" x 23" x 59"	145
TS-EVAP-36	36"	0.5	11.2	4800/6600/9600	2500	32 gal.	62" x 32" x 67"	245
TS-EVAP-36HD	36"	0.7	15.0	12500	3125	60 gal.	67" x 77" x 34½"	307
TS-EVAP-48	48"	1	12.0	11000/22000	4000	40 gal.	74" x 36" x 86"	405



Variable Speed Air Curtains

These Heavy Duty Air Curtains can be used above entry doors and industrial warehouse doors to prevent loss of cool air and maintain a clean environment. These curtains contain a heavy duty 20 gauge rigid steel cabinet, with baked on epoxy powder coat paint for durability. Motor is a heavy duty, PSC, direct drive high efficiency, and signed for use with SCR controllers. Motors are permanently lubricated for long life and have thermal over load protection. SCR speed controller supplied on all units compatible with the motor with low end adjustment for air volume control and savings in power consumption. These heavy duty units have a ¾ HP motor, 120V power and can go up to a 12' high doorway. Heating options available, contact factory.

MODEL Number	DIMENSIONS WIDTH x HEIGHT (INCHES)	CFM (LOW x HIGH)	WEIGHT (POUND)
ACURT-36	36" x 16" (1 ACURT-36)	819 / 2672	77
ACURT-48	48" x 16" (1 ACURT-48)	906 / 4611	85
ACURT-60	60" x 16" (1 ACURT-60)	1126 / 5763	93
ACURT-72	72" x 16" (2 ACURT-36's)	1638 / 5344	154
ACURT-96	96" x 16" (2 ACURT-48's)	1812 / 9222	170
ACURT-108	108" x 16" (3 ACURT-36's)	2457 / 8016	231
ACURT-120	120" x 16" (1 ACURT-48 & 2 ACURT-36's)	2544 / 9955	239



Quartz Infrared Spot Heaters 1-PHASE STANDARD

Keep cool work areas well heated with these Infrared Heaters. The quartz tube radiates a blanket of heat in a 60° symmetrical pattern. Unit includes; gold aluminum reflector and end caps, mounting chains, S-hooks, and a cord set with plug. Units can be hung from the ceiling with mounting chains. For indoor use. Meets OSHA standards and is ETL C/US listed. Indoor use only.

MODEL Number	WATTS	VOLTS	PHASE	BTU's	WEIGHT (POUND)	
VCH-46C	1500	115	1	5120	9	
VCH-57C	3000	240	1	10240	11	
VCH-WG46	S.S. V	S.S. WIRE GUARDS (use with model VCH-46C)				
VCH-WG57	S.S. \	VIRE GUARDS (1	use with model VC	H-57C)	2	



model CRFH-198 model FFH-118

Portable Electric Heaters 1-PHASE STANDARD

Portable Electric Heaters are lightweight and have an easy grip handle for convenience. These heaters are perfect for office, or small spot heating applications. They include a 6 foot long 3 conductor cord and temperature control thermostat. Model CFFH-240 has a 20 amp plug configuration, which is great for construction sites. Model FFH-118 and CRFH-198 meet OSHA standards and are ETL C/US listed, while CFFH-240 is only UL C/US listed. Indoor use only.

MODEL NUMBER	OVERALL SIZE (W x D x H)	NUMBER Of Settings	VOLTAGE/PHASE	BTU's	WEIGHT (POUND)
FFH-118	10" x 9½" x 16"	2 HEAT / 1 FAN	120, 1PH	5120	10
CRFH-198	11" x 12" x 15"	3 HEAT	120, 1PH	5120	10
CFFH-240	10 ⁵ /8" x 10" x 12¾"	2 HEAT	240/208, 1PH	13648	15

Portable Electric Salamanders

The Portable Electric Salamander are the perfect odorless, flameless, electric alternative to propane and kerosene space heaters. Safety yellow heater encloses with safety screens on both air intake and output openings. The unit includes long-life finned tubular heating elements, thermostat adjustment, and a fan only operating feature. Includes access panel for direct wiring connections. Wheels and handle for easy portability over all surface types. Units are ETL C/US listed. Indoor use only.

MODEL Number	DESCRIPTION	KW AMPS	VOLTS Phase	TEMP RISE	WEIGHT (POUND)
PES-1520-3	PORTABLE HEATER	15/42	208/3	45	65
PES-1524-1	PORTABLE HEATER	15/63	240/1	45	69
PES-1524-3	PORTABLE HEATER	15/36	240/3	45	69
PES-1548-3	PORTABLE HEATER	15/18	480/3	45	65
PES-3048-3	PORTABLE HEATER	30/36	480/3	90	83
PES-1024-1*	PORTABLE HEATER	10/42	240/1	30	63

^{*}FACTORY PRE-WIRED WITH 10' CABLE & STRAIGHT BLADE RANGE PLUG

OPTIONAL 25 FOOT CORD WITH PLUG							
MODEL Number	CABLE TYPE	USE WITH MODEL					
PES-43-SO	4/3 SO. POWER CORD	PFS-1524-1					
PES-64-SO	6/4 SO, POWER CORD	PES-1520-3, PES-1524-3, PES-3048-3					
PES-124-SO	12/4 SO, POWER CORD	PES-1548-3					



model PES-1520-3


Portable Electric Infrared Heaters 3-PHASE STANDARD

Provide instant, odor-free heat for indoor and semi-protected outdoor workstations and warehouse areas. Economical electric infrared heat warms only persons and objects, not the air volume. Durable heavy-duty flat panel emitter heating elements are designed for a variety of applications using no glass materials. All models have gold anodized aluminum reflectors, terminal box, protective wire screens, and reinforced front edge and corner construction. Heaters can be adjusted on the hand cart to operate in a horizontal or vertical position for maximizing the infrared heating pattern. Carts consist of a rugged steel design and are equipped with 6" rubber wheels and twin hand grips. Heaters are factory wired for three phase, but can be converted to single phase for most units.

MODEL Number	WATTS	BTU's	VOLTS	PHASE	AMPS	WEIGHT (POUND)
VFSP-4324-3	4300	14,672	240	3	10.36	41
VFSP-4348-3	4300	14,672	480	3	5.18	41
VFSP-9524-3	9500	32,415	240	3	22.89	58
VFSP-9548-3	9500	32,415	480	3	11.44	58







model VFSP-9548-3

Portable Infrared Heaters 220V 1-PHASE STANDARD

Radiant heat can be adjusted in distance and height. Adjustable brightness for various applications. Requires 220V single phase power supply @ 15 amps. Portable with four swivel casters (two with brakes). Timer is included for auto-shut off. Indoor use only.

MODEL Number	MAXIMUM Power Output	LAMP ELEMENTS	ELEMENT OVERALL Size (W x D x H)	ELEMENT EACH Size (W x D x H)	WEIGHT (POUND)
HEAT-S	2400 W	3	27" x 6" x 30"	23½" x 4¼" x 7¾"	105
HEAT-S1	2000 W	4	39" x 6" x 18"	17¾" x 4¼" x 7¾"	115
HEAT-S2	3000 W	6	39" x 6" x 30"	17¾" x 4¼" x 7¾"	135




Portable Quartz Infrared Spot Heater (115V 1-PHASE STANDARD)

Portable heater adjusts from 2' to 6' in height. Wire guard is included, as well as a 15' cord set with plug (3 wire). Unit comes standard with four $2\frac{1}{2}$ " casters. Meets OSHA standards and is ETL C/US listed. Indoor use only.

MODEL Number	WATTS	BTU's	VOLTS	PHASE	WEIGHT (POUND)
VCH-48-P	1500	5,120	115	1	30





Portable Infrared Heat Panels

Portable Infrared Heat Panels are a great asset in cold work areas. Units can be rolled easily to an array of areas without the need of additional personnel of lifting devices. The overall height allows the heat to expand more freely through out the workspace and quickly diminishes cold areas. Can fit in confined spaces when not in use.

MODEL NUMBER	VOLTAGE	LAMP ELEMENTS	OVERALL SIZE (W x H x D)	HEATED AREA (W x H)	WEIGHT (POUND)
PIHP-4	240	4	44 ⁵ /8" x 44" x 56½"	61" x 77"	116
PIHP-6	240	4	66 ⁵ /8" x 77" x 56½"	40" x 44"	141
PIHP-11	240	7	66 ⁵ /8" x 44" x 89½"	61" x 44"	225



model JAN-SM

model JAN-LG

Manual Brush Sweepers

Use these sweepers anywhere, indoors or out, on concrete, asphalt, tile, and commercial carpets. Great for parking lots, gas stations, theaters, warehouses, schools, etc.

Model JAN-II is faster and more efficient than cleaning with conventional push brooms. The rotation of the wheels causes the brushes to rotate and pick up material. The side broom allows for cleaning along curbs, walls, and in corners. Contains no electric motor. Removable handle for storage is standard. Steel construction.

Model JAN-SM includes two (2) brushes on each front corner with a ¹/₄" overlap. A retractable handle is ideal for storage.

Model JAN-LG is a deluxe brush sweeper. The two (2) 11" diameter brushes, one on each front corner, come with independent $\frac{1}{2}$ " height adjustment. The bottom center brushes also features $\frac{1}{2}$ " height adjustment. Those brushes measure $\frac{17}{2}$ " x $\frac{5}{2}$ ". A folding handle for easy storage is standard.

	MODEL Number	OVERALL SIZE (W x D x H)	SWEEPING Area	CAPACITY (GALLONS)	POWERED	WEIGHT (POUND)
k	JAN-II⊕	27" x 32½" x 13"	27"	10	BELT DRIVEN	81
	JAN-SM⊕	21¼" x 24" x 43"	22"	6	GEAR DRIVEN	20
	JAN-LG⊕	32½" x 30" x 41½"	32½"	9	BELT DRIVEN	35



Magnetic Push Sweepers

Magnetic Sweepers are ideal for manufacturing facilities and construction sites. The sweeper is ergonomically friendly with an efficient handle controlled release. The design and capacity can accommodate large and small materials. While the standard handle allows for comfortable upright position during use, the wheels allow smooth rolling for quick and easy collection of objects.

Model MPSR-24-B and MPSR-36-B have a bent handle for more ergonomic handling.

Model TAM-30 is constructed of aluminum frame for lightweight strength. Other features include a telescoping handle for easy storage and length preference, a manual release for safe disposal, and a rotatable base for maneuverability.

MODEL Number	REMOVAL PROCESS	SWEEP WIDTH	WEIGHT (POUND)
MFSR-18	HANDLE RELEASE (on top of sweeper)	18"	14
MFSR-24	HANDLE RELEASE (on top of sweeper)	24"	16
MFSR-30	HANDLE RELEASE (on top of sweeper)	30"	21
MFSR-36	HANDLE RELEASE (on top of sweeper)	36"	23
MPSR-24	HANDLE RELEASE LEVER (on handle)	24"	14
MPSR-24-B	HANDLE RELEASE LEVER (on handle)	24"	40
MPSR-36-B	HANDLE RELEASE LEVER (on handle)	36"	51
TAM-30	MANUAL RELEASE	3"	4

Fork Truck Mounted Brush Sweepers

Fork Truck Brush Sweepers are ideal for interior and exterior commercial sweeping. Great for cleanup applications; docks, warehouses, and parking lots. Lightweight aluminum body with polypropylene bristles. Powder coat finish. Attach unit by sliding forks into pockets and securing with locking screws.

Optional Magnets are a great asset to manufacturing and construction facilities. Enables the user to collect material in fewer passes. For best use, attach the magnet to the front of the existing broom and fasten to the forklift. Once in place, while traversing the desired area the magnet will detect metal items before they get caught in the bristles of the broom. Works with series VSWP and VPS.

The optional **Edge Markers** work with the deluxe brush sweeper series VPS. The 36" high markers are a visible indicator of the edge of the room for safety precautions. The units height allows the user to be informed while still maintaining the proper drive position.

Optional **Dust Mop** attaches to collect dust and fine particles on smooth floors. Works with series VSWP and VPS.

MODEL Number	OVERALL SIZE (W x D x H)	FORK POCKET (W x D x H)	SWEEPING WIDTH	BRISTLE Length	WEIGHT (POUND)	
ECONOMY BRUSH	SWEEPERS					
VSWP-48⊛	48" x 5" x 9"	5" x 8" x 2"	48"	8"	43	
VSWP-60⊛	61" x 5" x 9"	5" x 8" x 2"	60"	8"	51	
VSWP-48-RB	48" RE	PLACEMENT BRU	SH KIT (5 ROWS	TO A KIT)	18	
VSWP-60-RB	60" RE	60" REPLACEMENT BRUSH KIT (5 ROWS TO A KIT)				
DELUXE BRUSH SV	VEEPERS					
VPS-60®	60" x 16" x 12"	8 ³ / ₈ " x 15½" x 2"	60"	11"	146	
VPS-72®	74" x 16" x 4½"	8 ³ / ₈ " x 15½" x 2"	72"	11"	173	
VPS-60-RB	60" RE	PLACEMENT BRU	SH KIT (8 ROWS	TO A KIT)	60	
VPS-72-RB	72" RE	PLACEMENT BRU	SH KIT (8 ROWS	TO A KIT)	70	
OPTIONS						
VSWP-48-MG	4 FT. LONG MAGNET use with VSWP-48 & VSP-48					
VSWP-60-MG	5 FT. LONG MAGNET use with VSWP-60 & VSP-60					
VSP-EMK	EDGE MARKERS use with series VSP					
VSWP-60-DM	DUST MOP ATT	ACHMENT use wit	h VSWP-60 & V	SP-60	10	



model VSWP-48



model VSWP-60-DM

model VSP-EMK


Hanging Magnetic Sweepers

Hanging Magnetic Sweepers are ideal for cleaning industrial settings, parking lots, and loading areas. The design is durable, yet lightweight, for easy maneuverability and portability from work area to work area. A release lever on series MS and HFMS is located in the sweeper for simple, safe discarding of fragments. Constructed with heavy gauge steel and aluminum. Comes completely assembled.

Hanging Magnetic Sweepers, Chain Hang-Type with eyebolts and chains for hanging units from a vehicle.

Hanging Magnetic Sweepers *with Forklift Hang-Type* can be suspended from a fork lift for smooth and efficient gathering of material, both large and small. Fork pockets measure 5"W x 1¼"H.

MODEL Number	DESCRIPTION	SWEEP WIDTH	CAPACITY (POUND)	WEIGHT (POUND)				
MAGNETIC HANG-	MAGNETIC HANG-TYPE SWEEPER							
MS-36⊕	CHAIN HANG-TYPE	36"	45	23				
MS-48	CHAIN HANG-TYPE	48"	55	28				
MS-60	CHAIN HANG-TYPE	60"	65	34				
MS-72®	CHAIN HANG-TYPE	72"	75	39				
MAGNETIC HANG-	TYPE SWEEPER - HEAVY-DUTY							
HDMS-36	CHAIN HANG-TYPE	36"	75	47				
HDMS-48	CHAIN HANG-TYPE	48"	100	61				
HDMS-60	CHAIN HANG-TYPE	60"	120	75				
HDMS-72	CHAIN HANG-TYPE	72"	130	91				
MAGNETIC HANG-	TYPE SWEEPER WITH FORK LIFT HANG	iER						
HFMS-36	FORKLIFT HANG-TYPE	36"	45	23				
HFMS-48	FORKLIFT HANG-TYPE	48"	55	28				
HFMS-60	FORKLIFT HANG-TYPE	60"	65	34				
HFMS-72	FORKLIFT HANG-TYPE	72"	75	39				
MAGNETIC HANG-	TYPE SWEEPER WITH FORK LIFT HANG	ER - HEAVY-DUT	Y					
HDFMS-36	FORKLIFT HANG-TYPE	36"	75	53				
HDFMS-48	FORKLIFT HANG-TYPE	48"	100	68				
HDFMS-60	FORKLIFT HANG-TYPE	60"	120	82				
HDFMS-72	FORKLIFT HANG-TYPE	72"	130	98				

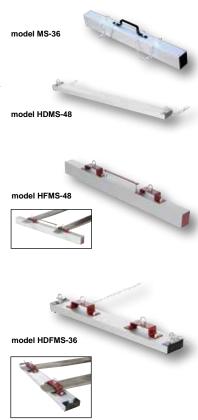



Floor Tape Applicators & Floor Tape

Model TPA-10 - Designed to apply tape as you walk. Solid steel construction, comfortable hand grips, and durable rubber wheels allow for easy operation and maintenance. Features a soft rubber applicator head. Holds tape rolls with a 3" diameter core and widths between 1" minimum and 4" maximum.

Model TPA-20 - Applicator head adjusts quickly to apply tape in circular path or in a long straight line. Rear stabilizer adjusts right and left to allow for marking next to walls and pallet racks. Holds tape rolls with a 3" core and width between 1" minimum to 4½" maximum.

FLOOR TAPE APPLIC	FLOOR TAPE APPLICATOR						
MODEL	MAXIMUM		TAPE	WEIGHT			
NUMBER	ROLL DIA	METER	WIDTHS	(POUND)			
TPA-10 [®]	6½"		1" - 4"	15			
TPA-20 [®]	7"		1" - 4½"	21			
YELLOW/BLACK STR	IPED FLOOR TAP	E					
MODEL				WEIGHT			
NUMBER	WIDTH	LENGTH	COLOR	(POUND)			
YB-282-R⊛	2"	82 FT.	YELLOW/BLACK	1			
YB-382-R⊛	3"	82 FT.	YELLOW/BLACK	1			



model LINE-SA



Line Markers

Model LINE-SA - Lightweight applicator for marking paint lines on ground, trenches, construction and landscaping. Approximate stripe width is 1½". Pull trigger to spray. Holds one standard inverted marking aerosol can of spray paint. Overall height is 37½". Steel construction with painted finish.

Model LINE-SA-W - Economical applicator - simply pull trigger to mark paint lines on floors. Holds one standard aerosol can of inverted marking spray paint. Wheels assist with creating an even line approximately 11/4" wide. Steel construction with painted finish.

MODEL Number	DESCRIPTION	WEIGHT (POUND)
LINE-SA	HANDHELD WAND APPLICATOR	4
LINE-SA-W	PORTABLE APPLICATOR W/WHEELS	6



Reel Mover Handle

A reel mover handle is the perfect way to transfer wire reels throughout the workspace. The long handle allows the user to walk/stand in the proper upright position which diminishes the amount of time bending and twisting while moving reels manually. The strong construction gives the user the ability to secure the reel to the handle and transport throughout the designated working area. Works well in manufacturing and construction facilities.

MODEL		MAX REEL	MAX REEL	MIN REEL	MAX REEL	WEIGHT
NUMBER	DESCRIPTION	HEIGHT	LENGTH	CORE	CORE	(POUND)
RMH-C-5020-3	REEL MOVER	54"	2011/16"	1 ¹¹ / ₁₆ "	37/8"	18

Welding Curtain Roll

The welding curtains promotes safety throughout manufacturing and construction facilities. The strong flame retardant vinyl design keeps materials from passing into other works areas. The unit includes a pregrommeted top side for simply hanging in the designated work space. An assortment of colors are available.

MODEL		TRANSPARENT	WEIGHT
NUMBER	DESCRIPTION	COLOR	(POUND)
WCR-6025-G	WELDING CURTAIN ROLL 14 mil	GRAY	12
WCR-6025-O	WELDING CURTAIN ROLL 14 mil	ORANGE	12
WCR-6025-Y	WELDING CURTAIN ROLL 14 mil	YELLOW	12

Industrial Acrylic Convex Mirrors

These Acrylic Convex Mirrors eliminate those blind spots and danger areas found in most industrial settings. Lightweight design made from the finest quality materials, using Grade A Optical Acrylic. Comes standard with hanging or mounting hardware.

MODEL		OVERALL	DISTANCE	WEIGHT
NUMBER	DESCRIPTION	DIAMETER	COVERED	(POUND)
ROUND CONVEX MIRE	RORS			
CNVX-12®	INDOOR USE	12"	12'	4
CNVX-18®	INDOOR USE	18"	20'	5
CNVX-26®	INDOOR USE	26"	26'	10
CNVX-30®	INDOOR USE	30"	30'	12
CNVX-18-O®	OUTDOOR USE	18"	20'	10
CNVX-26-O®	OUTDOOR USE	26"	26'	16
CNVX-30-O®	OUTDOOR USE	30"	30'	20
CNVX-36-O®	OUTDOOR USE	36"	36'	28
CNVX-2618	RECTANGULAR	26"W x 18"H	26'	11
DOME ACRYLIC MIRR	ORS			
DOME-18	360° FULL DOME	18"	18'	5
DOME-26	360° FULL DOME	28"	26'	9
DOME-32	360° FULL DOME	34"	32'	15
DOME-36	360° FULL DOME	36"	36'	18
DOME-H18	180° HALF DOME	18"	18'	3
DOME-H26	180° HALF DOME	28"	26'	5
DOME-H32	180° HALF DOME	34"	32'	10
OBLONG HALLWAY M	IRROR			
OFF-EYE	OBLONG	16"W x 7¾"H	10' to 12'	3
WIDE VIEW CONVEX	MIRRORS			
CNVX-W-16	INDOOR 4" DEEP	16"	16' to 20'	6
CNVX-W-24	INDOOR 5" DEEP	24"	25' to 30'	12
CNVX-W-32	INDOOR 7" DEEP	32"	35' to 40'	21
CNVX-WO-16	OUTDOOR 4" DEEP	16"	16' to 20'	8
CNVX-WO-24	OUTDOOR 5" DEEP	24"	25' to 30'	16
CNVX-WO-32	OUTDOOR 7" DEEP	32"	35' to 40'	24
INSPECTION MIRROR				1
SIM-12-WF	WHEEL & LIGHT	12"	12'	12
SIM-8	INSPECTION MIRROR	8"	8'	7

Stainless Steel Flag Poles and American Flags

Flagpole features a bright-polished stainless steel finish to elegantly display your flag of choice. The one-piece stainless steel tapered construction will maintain its attractive finish for many years to come. Includes nylon rope, stainless steel rope cleat, and top pulley. Base plate is pre-drilled with four mounting holes. Flag poles are rated for 60 mph wind. United States flags are available in a durable nylon fabric.

MODEL Number	TOP DIAMETER	MIDDLE Diameter	BOTTOM Diameter	HEIGHT	RECOMMENDED Flag Size (W x H)	WEIGHT (POUND)
FLP-20-SS®	3"		3½"	20'	5' x 3'	123
FLP-25-SS®	3"	3½"	4"	25'	6' x 4'	150
MODEL Number	WID (FEE		HEIGHT (FEET)		USE WITH Pole model	WEIGHT (POUND)
AFL-20⊛	5		3		20 FT. POLE	2
AFL-25⊛	6		4		25 FT. POLE	2
AFL-30⊙	8		5		30 FT. POLE	2





(to Ship

model SIM-12-WF

48 Hours to Ship





Picnic Tables - Steel Mesh

Steel Mesh Picnic Tables are constructed of heavy-gauge steel mesh with thermoplastic coating on tabletops. The smooth, high gloss surface stays cool to the touch and resists fading, mold, and vandalism. The rugged tubular steel frame is powder coated black for rust prevention. Table corners are beveled for safety.

Prefix PT-MX-RT tables have an umbrella hole 15/8"(ID).

MODEL Number	COLOR	SIZE	WEIGHT (POUND)
ROUND PICNIC TABLES	0020	V.=_	(1.00112)
PT-MX-RT-46-BK⊕	BLACK	46" DIAMETER	245
PT-MX-RT-46-BN⊕	BROWN	46" DIAMETER	245
PT-MX-RT-46-GN [®]	GREEN	46" DIAMETER	245
SQUARE PICNIC TABLES			
PT-MX-ST-46-BK®	BLACK	46" x 46"	245
PT-MX-ST-46-BN⊕	BROWN	46" x 46"	245
PT-MX-ST-46-GN [®]	GREEN	46" x 46"	245
RECTANGLE PICNIC TABLES			
PT-MX-3072-BK®	BLACK	72" LENGTH	216
PT-MX-3072-BN®	BROWN	72" LENGTH	216
PT-MX-3072-GN [®]	GREEN	72" LENGTH	216
PT-MX-3096-BK®	BLACK	96" LENGTH	260
PT-MX-3096-BN®	BROWN	96" LENGTH	260
PT-MX-3096-GN®	GREEN	96" LENGTH	260



model PT-PHX-3944-BKCD-ADA Recycled Plastic Construction ADA Compliant





model PT-PWT-2872-BKCD

Picnic Tables & Benches - Recycled Plastic

Recycled Plastic Picnic Tables are constructed to provide many years of maintenance free service. Choose from multiple colors, sizes, and configurations. Molded in color resists fade and will not wear. ADA (wheelchair accessible) design also available. Suffix *BKCD* tables have a cedar color on the top/seats with black legs. Suffix *BKGY* tables have gray on the top/seats with black legs.

Prefix PT-PHX tables have an umbrella hole 1¾"(ID).

MODEL Number	DESCRIPTION	OVERALL SIZE	WEIGHT
		(W x D x H)	(POUND)
PT-PHX-3944-BKCD	HEXAGON TABLE	69½" x 69½" x 30¼"	350
PT-PHX-3944-BKGY	HEXAGON TABLE	69½" x 69½" x 30¼"	350
PT-PHX-3944-BKCD-ADA	HEXAGON - ADA VERSION	69½" x 69½" x 30¼"	335
PT-PHX-3944-BKGY-ADA &	HEXAGON - ADA VERSION	69½" x 69½" x 30¼"	335
PT-PWT-2872-BKCD	RECTANGLE WALK-THRU	72" x 58" x 29¾"	390
PT-PWT-2872-BKGY	RECTANGLE WALK-THRU	72" x 58" x 29¾"	390
PT-PWT-2896-BKCD	RECTANGLE WALK-THRU	96" x 58" x 29¾"	575
PT-PWT-2896-BKGY	RECTANGLE WALK-THRU	96" x 58" x 29¾"	575
PT-PAF-2872-BKCD	6' A-FRAME TABLE	72" x 60" x 30"	430
PT-PAF-2872-BKGY	6' A-FRAME TABLE	72" x 60" x 30"	430
PT-PAF-2896-BKCD	8' A-FRAME TABLE	96" x 60" x 30"	575
PT-PAF-2896-BKGY	8' A-FRAME TABLE	96" x 60" x 30"	575
PT-PAF-2896-BKCD-ADA &	8' A-FRAME ADA VERSION	96" x 60" x 33½"	550
PT-PAF-2896-BKGY-ADA &	8' A-FRAME ADA VERSION	96" x 60" x 33½"	550





Benches - Steel Mesh

Steel Mesh Benches are constructed of heavy-gauge steel mesh with thermoplastic coating. The smooth, high gloss surface stays cool to the touch and resists fading, mold, and vandalism. The rugged tubular steel frame is powder coated black for rust prevention. Bench corners are beveled for safety.

MODEL Number	COLOR	SIZE	WEIGHT (POUND)
BEN-MX-72-BK®	BLACK	72" LENGTH	143
BEN-MX-72-BN®	BROWN	72" LENGTH	143
BEN-MX-72-GN [®]	GREEN	72" LENGTH	143
BEN-MX-96-BK®	BLACK	96" LENGTH	160
BEN-MX-96-BN®	BROWN	96" LENGTH	160
BEN-MX-96-GN®	GREEN	96" LENGTH	160

Benches - Recycled Plastic

Recycled Plastic Benches are constructed to provide many years of maintenance free service. Molded in color resists fade and will not wear. Suffix BKCD benches have a cedar color on the seats with black legs. Suffix BKGY benches have gray on the seats with black legs.

MODEL Number	DESCRIPTION	OVERALL SIZE (W x D x H)	WEIGHT (POUND)
BEN-PDB1-48-BKCD	4' DELUXE BENCH	48" x 28" x 331/4"	165
BEN-PDB1-48-BKGY	4' DELUXE BENCH	48" x 28" x 331/4"	165
BEN-PDB1-72-BKCD	6' DELUXE BENCH	72" x 28" x 331/4"	260
BEN-PDB1-72-BKGY	6' DELUXE BENCH	72" x 28" x 331/4"	260



Park Benches - Recycled Plastic

Get the look of a traditional bench at an economic price. Made entirely of 100% post-consumer recycled plastic. Sustainability, quality, and comfort are combined in a maintenance free bench. It will never need scraping, staining, painting, or storage and stands up to the harshest weather Mother Nature can dish out. Also available is permanent installation hardware or engrave a message on the back boards (contact factory for details).

MODEL		OVERALL SIZE	WEIGHT
NUMBER	COLOR	(W x L x H)	(POUND)
CAMBRIDGE BACKED BENC	H WITH ARMS	, ,	
BEN-PCBA-48-BKBK	BLACK/BLACK	26¾" x 48" x 30¼"	79
BEN-PCBA-48-BKBN	BLACK/BROWN	26¾" x 48" x 30¼"	79
BEN-PCBA-48-BKCD	BLACK/CEDAR	26¾" x 48" x 30¼"	79
BEN-PCBA-48-BKCH	BLACK/CHARCOAL	26¾" x 48" x 30¼"	79
DELUXE BACKED BENCH			
BEN-PDB2-72-BKBK	BLACK/BLACK	26 ¹ / ₈ " x 72" x 32½"	131
BEN-PDB2-72-BKBN	BLACK/BROWN	26 ¹ / ₈ " x 72" x 32½"	131
BEN-PDB2-72-BKCD	BLACK/CEDAR	26 ¹ / ₈ " x 72" x 32½"	131
BEN-PDB2-72-BKCH	BLACK/CHARCOAL	26 ¹ / ₈ " x 72" x 32½"	131
ECON BACKED BENCH			
BEN-PECB-48-BKBK	BLACK/BLACK	26¼" x 48" x 32¼"	72
BEN-PECB-48-BKBN	BLACK/BROWN	26¼" x 48" x 32¼"	72
BEN-PECB-48-BKCD	BLACK/CEDAR	26¼" x 48" x 32¼"	72
BEN-PECB-48-BKCH	BLACK/CHARCOAL	26¼" x 48" x 32¼"	72
BEN-PECB-72-BKBK	BLACK/BLACK	26¼" x 72" x 32¼"	114
BEN-PECB-72-BKBN	BLACK/BROWN	26¼" x 72" x 32¼"	114
BEN-PECB-72-BKCD	BLACK/CEDAR	26¼" x 72" x 32¼"	114
BEN-PECB-72-BKCH	BLACK/CHARCOAL	26¼" x 72" x 32¼"	114
BEN-PECB-96-BKBK	BLACK/BLACK	26¼" x 96" x 32¼"	152
BEN-PECB-96-BKBN	BLACK/BROWN	26¼" x 96" x 32¼"	152
BEN-PECB-96-BKCD	BLACK/CEDAR	26¼" x 96" x 32¼"	152
BEN-PECB-96-BKCH	BLACK/CHARCOAL	26¼" x 96" x 32¼"	152
LANDMARK BACKED BENCH			
BEN-PLMB-96-BKBK	BLACK/BLACK	26¼" x 96" x 33 ³ / ₈ "	188
BEN-PLMB-96-BKBN	BLACK/BROWN	26¼" x 96" x 33 ³ / ₈ "	188
BEN-PLMB-96-BKCD	BLACK/CEDAR	261/4" x 96" x 33 ³ /8"	188
BEN-PLMB-96-BKCH	BLACK/CHARCOAL	261/4" x 96" x 33 ³ /8"	188
MONARQUE BACKED BENCH			
BEN-PMQB-72-BKBK	BLACK/BLACK	29" x 72" x 32 ³ / ₈ "	129
BEN-PMQB-72-BKBN	BLACK/BROWN	29" x 72" x 32 ³ / ₈ "	129
BEN-PMQB-72-BKCD	BLACK/CEDAR	29" x 72" x 32 ³ /8"	129
BEN-PMQB-72-BKCH	BLACK/CHARCOAL	29" x 72" x 32 ³ /8"	129
TRADITIONAL BACKED BEN			
BEN-PTDB-72-BKBK	BLACK/BLACK	26¼" x 72" x 32½"	145
BEN-PTDB-72-BKBN	BLACK/BROWN	26¼" x 72" x 32½"	145
BEN-PTDB-72-BKCD	BLACK/CEDAR	26¼" x 72" x 32½"	145
BEN-PTDB-72-BKCH	BLACK/CHARCOAL	26¼" x 72" x 32½"	145
BEN-ABK	(4) "L" BRACKETS & (8) SCI	REWS ground anchors not included	1









model TR-PSQ-22-BK-CD

Trash Receptacles

The Economy 22 gallon receptacle represents both value and quality in a space-saving design. Made in America of 100% post consumer recycled plastic, it is available in (3) three slat colors with a black top. It is not only a sustainable product, it can be used for trash or recyclable items with custom engraving available on the top, contact factory.

The large capacity 33 and 49 gallon receptacles can be used for trash or as part of a recycling station. Made in America of 100% post-consumer recycled plastic, includes an inner plastic liner and are available in (3) three colors with a black top. Stainless steel fasteners ensure a rust resistant, long life and are internal to provide a clean, blemish-free appearance. Keep your environment clean and keep plastic out of the landfill at the same time.

We've added flare to utility with our Round Flare Top Receptacle! The unique design has an inner liner and 33 gallon capacity. Made in America of 100% post-consumer recycled plastic. It's eco-friendly while helping keep trash/recyclables in their place.



model TR-PRRC-33-CH



model TR-PRF-33-CD



model TR-PR-49-CH

MODEL Number	CAPACITY (GALLONS)	OVERALL SIZE (W x L x H)	COLOR	WEIGHT (POUND)
22 GALLON ECONOMY R	,	,		,
TR-PSQ-22-BK-BK	22	17" x 18½" x 28"	BLACK/BLACK	66
TR-PSQ-22-BK-CD	22	17" x 18½" x 28"	BLACK/CEDAR	66
TR-PSQ-22-BK-CH	22	17" x 18½" x 28"	BLACK/CHARCOAL	66
33 GALLON ROUND REC	EPTACLE			
TR-PR-33-BK	33	26 ³ /16" x 30"	BLACK	94
TR-PR-33-BN	33	26 ³ / ₁₆ " x 30"	BROWN	94
TR-PR-33-CD	33	26 ³ / ₁₆ " x 30"	CEDAR	94
TR-PR-33-GN	33	26 ³ / ₁₆ " x 30"	GREEN	94
TR-PR-33-CH	33	26 ³ / ₁₆ " x 30"	CHARCOAL	94
TR-PR-33-SD	33	26 ³ / ₁₆ " x 30"	SAND	94
33 GALLON ROUND REC				
TR-PRRC-33-BK	33	26 ³ / ₁₆ " x 37"	BLACK	114
TR-PRRC-33-BN	33	26 ³ /16" x 37"	BROWN	114
TR-PRRC-33-CD	33	26 ³ /16" x 37"	CEDAR	114
TR-PRRC-33-GN	33	26 ³ /16" x 37"	GREEN	114
TR-PRRC-33-CH	33	26 ³ /16" x 37"	CHARCOAL	114
TR-PRRC-33-SD	33	26³/16" x 37"	SAND	114
33 GALLON FLARED TOP	RECEPTACLE			
TR-PRF-33-CD	33	29 ¹ /16" x 33 ⁹ /16"	CEDAR	71
49 GALLON ROUND REC	1			
TR-PR-49-BK	49	29 ⁵ /8" x 34"	BLACK	123
TR-PR-49-BN	49	29 ⁵ / ₈ " x 34"	BROWN	123
TR-PR-49-CD	49	29 ⁵ / ₈ " x 34"	CEDAR	123
TR-PR-49-GN	49	29 ⁵ / ₈ " x 34"	GREEN	123
TR-PR-49-CH	49	29 ⁵ / ₈ " x 34"	CHARCOAL	123
TR-PR-49-SD	49	29 ⁵ / ₈ " x 34"	SAND	123
49 GALLON ROUND REC			D1 4 016	100
TR-PRRC-49-BK	49	29 ⁵ / ₈ " x 42 ¹ / ₈ "	BLACK	133
TR-PRRC-49-BN	49	29 ⁵ / ₈ " x 42 ¹ / ₈ "	BROWN	133
TR-PRRC-49-CD	49	29 ⁵ / ₈ " x 42 ¹ / ₈ "	CEDAR	133
TR-PRRC-49-GN	49	29 ⁵ / ₈ " x 42 ¹ / ₈ "	GREEN	133
TR-PRRC-49-CH	49	29 ⁵ / ₈ " x 42 ¹ / ₈ "	CHARCOAL	133
TR-PRRC-49-SD	49	29 ⁵ / ₈ " x 42 ¹ / ₈ "	SAND	133
HARDWARE	(4) III II DD 4 O	VETC 9 (0) CODE (4)		4
TR-ABK	(4) "L" BRAC	KEIS & (8) SCREWS	ground anchors not included	1

Expanded Metal Trash Can

The expanded metal trash cans are perfect for a variety of settings. The mesh style metal design allows for the amount level to be determined easier and allow for an easier cleanup. The strong, yet lightweight, construction withstands adverse conditions on a consistent basis and be moved easily without the need of extra personnel when empty. Available in a variation of colors.

MODEL Number	CAPACITY (GALLONS)	OVERALL SIZE (W x L x H)	COLOR	WEIGHT (POUND)
48 GALLON RECEPTAC	LE			
TR-MXR-48-BK	48	23½" x 23½" x 32¾"	BLACK	30
TR-MXR-48-HDG	48	23½" x 23½" x 32¾"	GALVANIZED	30
TR-MXR-48-GN	48	23½" x 23½" x 32¾"	GREEN	30
TR-MXR-48-RD	48	23½" x 23½" x 32¾"	RED	30




Tree Grates

The tree grate is the perfect addition to any facilities landscaping resources. The grate provides safety to the vegetation while maintaining the quality of the surrounding environment. The units are available in both square and round shapes to better fit the users landscaping needs. With a lightweight design, the units are able to be easily installed without the use of additional personnel. As the tree grows, the inside grate diameter can be expanded for a better fit. For best use, place each half of the grate around the tree on a flat surface and lock in place with the included hardware. ADA compliant.

The tree grate frame delivers great support to any existing or new grates. For best use, place each portion of the frame under the surface edge and fasten into place. Once in place, a new or existing grate can be fitted inside the frame for a smooth, uninterrupted surface.

Frame comes complete with four (4) 1 ½" square pre-drilled plastic frames (42" length for use with 48" square grate or 54" length for use with 60" square grate).

MODEL Number	DESCRIPTION	OVERALL SIZE (W x L x H)	COLOR	WEIGHT (POUND)
TREE GRATES				
TG-3R-BK	3 FT. ROUND	36" x 36" x 2"	BLACK	23
TG-4S-BK	4 FT. SQUARE	48" x 48" x 2"	BLACK	43
TG-5S-BK	5 FT. SQUARE	60" x 60" x 2"	BLACK	65
FRAMES				
TG-4S-F-BK	4 FT. SQUARE FRAME	1½" x 42" x 1½"	BLACK	20
TG-5S-F-BK	5 FT. SQUARE FRAME	1½" x 54" x 1½"	BLACK	20



Salt Boxes

A salt box is a great addition to any business or public facility. The box is constructed of a durable polyethylene that withstands the harsh effects of salt and other ice melting products. The bright color with lid provides great visibility in the work area during times of need. The unit is lockable for both safe transporting and to ensure the only users are authorized personnel. The large capacity allows for great amounts of material to be placed in the box for space saving efficiency.

The heavy duty scoop is perfect for the business or at home when handling salt and other winter related snow melting material. The polyethylene construction is both lightweight and durable for continuous use during the harsh winter months. The unit is brightly colored for simple visibility and quick locating during times of use.

MODEL Number	DESCRIPTION	OVERALL SIZE (W x L x H)	VOLUME Cubic Feet	WEIGHT (POUND)
ESB-5	ECONOMY	31½" x 22" x 24"	5	21
ESB-10	ECONOMY	41½" x 27" x 30½"	10	35
HDSB-5.5	HEAVY DUTY	32" x 22" x 24"	5 ½	10
HDSB-11	HEAVY DUTY	42" x 28" x 31"	11	50
HDSB-18	HEAVY DUTY	35" x 49" x 35"	18	65
SSP-05	SALT SCOOPS - 12	PER BOX		3











Durable plastic construction withstands extreme summer heat and allows collecting waste from multiple bins at a collective time. Great for high traffic areas such as: warehouses, fairs, ball parks, schools, etc. Strong, one-piece molded polyethylene body with steel base tip support and a balanced design to allow for simple dumping by one person. Easily portable on 2 large rubber wheels and two swivel wheels. Tapered front makes it easier to pour materials into yet another larger container. Rust resistant powder coated frame for strength and durability. Keep your waste out of sight in our medium duty and easy-to-move tilt trucks. Not for use with fork trucks.

MODEL Number	VOLUME Cubic Yards	UNIFORM Capacity	OVERALL SIZE (W x L x H)	WEIGHT (POUND)
TDT-50-LD-BLACK®	1/2	450 lb.	28" x 62" x 35"	91
TDT-50-LD-BLUE®	1/2	450 lb.	28" x 62" x 35"	91
TDT-50-LD-RED®	1/2	450 lb.	28" x 62" x 35"	91
TDT-50-LD-YELLOW®	1/2	450 lb.	28" x 62" x 35"	91
TDT-50-MD-BLACK®	1/2	850 lb.	28" x 62" x 35"	108
TDT-50-MD-BLUE®	1/2	850 lb.	28" x 62" x 35"	108
TDT-50-MD-RED⊙	1/2	850 lb.	28" x 62" x 35"	108
TDT-50-MD-YELLOW®	1/2	850 lb.	28" x 62" x 35"	108
TDT-50-HD-BLACK®	1/2	1,400 lb.	28" x 62" x 35"	113
TDT-50-HD-BLUE⊚	1/2	1,400 lb.	28" x 62" x 35"	113
TDT-50-HD-RED⊙	1/2	1,400 lb.	28" x 62" x 35"	113
TDT-50-HD-YELLOW®	1/2	1,400 lb.	28" x 62" x 35"	113
TDT-100-LD-BLACK®	1	850 lb.	32" x 73" x 42"	113
TDT-100-LD-BLUE⊛	1	850 lb.	32" x 73" x 42"	113
TDT-100-LD-RED⊙	1	850 lb.	32" x 73" x 42"	113
TDT-100-LD-YELLOW®	1	850 lb.	32" x 73" x 42"	113
TDT-100-MD-BLACK®	1	1,250 lb.	32" x 73" x 43"	135
TDT-100-MD-BLUE®	1	1,250 lb.	32" x 73" x 43"	135
TDT-100-MD-RED⊕	1	1,250 lb.	32" x 73" x 43"	135
TDT-100-MD-YELLOW®	1	1,250 lb.	32" x 73" x 43"	135
TDT-100-HD-BLACK®	1	2,100 lb.	32" x 73" x 43"	140
TDT-100-HD-BLUE®	1	2,100 lb.	32" x 73" x 43"	140
TDT-100-HD-RED®	1	2,100 lb.	32" x 73" x 43"	140
TDT-100-HD-YELLOW _®	1	2,100 lb.	32" x 73" x 43"	140

Skid Steer Buckets

Skid steer buckets provide an easy way to transfer products, both big and small. The universal mounting system allows the unit to be utilized in conjunction with a variety of skid steers on the market. A high strength front cutting edge resists wear and cuts through the toughest of terrain. With a reinforced bottom plate and sides, and an all welded steel construction, this bucket will perform at the highest levels. The back plate is designed to move liquid materials like concrete. An anti-slip step guard is functionally placed at the top edge of the bucket for safe exiting of the skid steer. Excellent for landscaping, farming, and residential operations.


Good for handling lightweight materials such as: dirt, mulch, snow, and sand.



MODEL Number	OVERALL SIZE (W x D x H)	HEAPED Capacity	WEIGHT (POUND)
EA-SKSB-60-LP	60" x 31 ¹⁵ / ₁₆ " x 18½"	13 cu. ft.	321
EA-SKSB-66-LP	66" x 31 ¹⁵ / ₁₆ " x 18½"	15 cu. ft.	336
EA-SKSB-68-LP	68" x 31 ¹⁵ / ₁₆ " x 18½"	16 cu. ft.	351
EA-SKSB-72-LP	72" x 31 ¹⁵ / ₁₆ " x 18½"	17 cu. ft.	366
EA-SKSB-76-LP	76" x 31 ¹⁵ / ₁₆ " x 18½"	18 cu. ft.	376

Industrial Scooter

Get where you need to be quickly and safely with our manually powered Industrial Scooter. Sturdy foot rest includes a manually operated rear brake that safely stops the Scooter at your destination. Fixed height handle bars control front wheel maneuvering through narrow aisles and doorways. A 27" wide x 23" long front platform holds up to 100 uniform pounds, ideal for crates, boxes, and other small loads. Rolls on high performance smooth rolling 8" x 1¼" polyurethane wheels. Ships knocked down.





Industrial Bicycles

A quick, easy, and safe way to move around large facilities. Built with rider friendly features and the ability to handle various loads while moving through a facility with ease and efficiency. A three wheel design includes hand brakes for sure stopping. Adjustable height seat for different sized people. Large payload / cargo area included.

MODEL Number	OVERALL SIZE (W x L x H)	UNIFORM STATIC CAPACITY	COLORS	WEIGHT (POUND)
IBIKE-3-DC-R	29" x 70" x 43"	250 lb.	RED	87
IBIKE-3-DC-B	29" x 70" x 43"	250 lb.	BLUE	87
IBIKE-3-DC-G	29" x 70" x 43"	250 lb.	GREEN	87
IBIKE-3-DC-P	29" x 70" x 43"	250 lb.	PURPLE	87
IBIKE-3-HH-Y	33½" x 79" x 45"	500 lb.	YELLOW	146
IBIKE-3-HH-BL	33½" x 79" x 45"	500 lb.	BLACK	146
IBIKE-3-DCHH-Y	29" x 70" x 43"	350 lb.	YELLOW	113
OPTIONAL REAR BASKET (WORKS WITH IBIKE-3-DCHH-Y)			
IBIKE-3-DCHH-RWB	21" x 9" x 15"	60	WHITE	7

model IBIKE-3-HH-BL

Eco-Friendly Bicycle Racks

Eco-Friendly Bike Racks provide users with a high level of security to lock up their bikes and other recreational toys. Made in America of 100% post-consumer recycled plastic, the six posts fit perfectly where space is limited. Promote a healthy lifestyle in your school, community, and public spaces by providing a secure rack to park bikes.

MODEL Number	INSERT POSITIONS	OVERALL SIZE (W x L x H)	COLORS	WEIGHT (POUND)
BR-P6-BK-BK	6	42" x 48 ⁷ / ₁₆ " x 31"	BLACK/BLACK	92
BR-P6-BK-CD	6	42" x 48 ⁷ /16" x 31"	BLACK/CEDAR	92
BR-P6-BK-CH	6	42" x 48 ⁷ /16" x 31"	BLACK/CHARCOAL	92
BR-P10-BK-BK	10	42" x 72" x 31"	BLACK/BLACK	139
BR-P10-BK-CD	10	42" x 72" x 31"	BLACK/CEDAR	139
BR-P10-BK-CH	10	42" x 72" x 31"	BLACK/CHARCOAL	139
BR-ABK	(4) "L" BRACK	ETS & (8) SCREWS	ground anchors not included	1



Bicycle Racks

Our Bicycle Racks make it easy to store bikes where space is at a premium. Welded steel units feature eight (8) mounting flanges with pre-drilled 7/16" holes for easy mounting with the exception of series BR-GL. Series BR-GL has two (2) mounting holes that are 3/4" diameter. Hardware is sold separately. Racks are shipped fully-assembled and ready to use. Available in a powder coat black or galvanized finish. Other powder coat finishes are available. Please contact factory.

MODEL Number	BIKE Capacity	MOUNTING Style	OVERALL SIZE (W x L x H)	WEIGHT (POUND)
BLACK POWDER COAT	FINISH			
BR-L2-BK	5	GROUND	4" x 31" x 36"	25
BR-L3-BK	7	GROUND	4" x 49" x 36"	36
BR-ST-BK	2	GROUND	20" x 38 ⁵ / ₁₆ " x 26½"	31
BR-M3S-BK	3	GROUND	13 ¹³ / ₁₆ " x 45 ⁷ / ₈ " x 14 ⁹ / ₁₆ "	31
BR-M3D-BK	6	GROUND	27¼" x 42" x 14 ⁹ / ₁₆ "	53
BR-M3S-W-BK	3	WALL	12 ⁷ /8" x 40 ³ /8" x 4 ¹ / ₁₆ "	23
BR-GL-BK⊕	4	GROUND	5 ⁵ / ₁₆ " x 12 ³ / ₄ " x 22 ¹ / ₂ "	22
GALVANIZED FINISH				
BR-L2-GAL	5	GROUND	4" x 31" x 36"	25
BR-L3-GAL	7	GROUND	4" x 49" x 36"	36
BR-ST-GAL	2	GROUND	20" x 38 ⁵ / ₁₆ " x 26 ¹ / ₂ "	31
BR-M3S-GAL	3	GROUND	13 ¹³ /16" x 45 ⁷ /8" x 14 ⁹ /16"	31
BR-M3D-GAL	6	GROUND	27 ³ /16" x 42" x 14 ⁹ /16"	53
BR-M3S-W-GAL	3	WALL	$12^{7}/8$ " x $40^{3}/8$ " x $4^{1}/16$ "	23
BR-GL-G⊕	4	GROUND	5 ⁵ / ₁₆ " x 12 ³ / ₄ " x 22 ¹ / ₂ "	22
AS-383®	3/8" x 3"L CONCRETE ANCHOR (Sold Each) for 7/16" holes			1
AS-584®	5/8" x 4"L C	CONCRETE AN	CHOR (Sold Each) for 3/4" holes	1

SPECIAL POWDER COAT FINISH OPTIONS					
ERGO BLUE	SODA RED				
SKY BLUE	BUBBLE GUM				
SILVER LINING	CITRUS ORANGE				
MACHINE GRAY	YELLOW				
BATTLESHIP GRAY	HUNTER GREEN				
BROWN	TRACTOR GREEN				
KHAKI TAN	SNOWY WHITE				
SANDY BEIGE	LIQUID ENAMEL PRIMER				





model BR-M3D-BK



Deluxe Spring Driven Low Pressure Hose Reels

Keep air hoses off the floor and out of the way. Minimize labor, save storage space, protect against trip hazards and damaged hoses. For use with air and water only. Solid steel construction with heavy-duty brackets to resist hose pull. All reels have a full shaft and swivel to assure maximum product delivery. Maximum temperature is 150° F. Maximum pressure is 300 psi / 21 bar. Includes self retracting hose.

TYPE	MODEL Number	OVERALL SIZE (W x D x H)	INSIDE HOSE Diameter	LENGTH OF HOSE	WEIGHT (POUND)
Α	VHR-20-44®	6¼" x 15" x 15"	1/4"	20 FOOT	19
Α	VHR-35-44⊛	5½" x 12½" x 13"	1/4"	35 FOOT	31
Α	VHR-17-46⊛	6" x 15" x 15½"	3/8"	17 FOOT	31
Α	VHR-25-46⊛	6½" x 14¾" x 15½"	3/8"	25 FOOT	26
Α	VHR-50-56⊚	7½" x 19½" x 20"	3/8"	50 FOOT	43
В	VHR-35-58 ₉	8" x 9¼" x 18"	1/2"	35 FOOT	43
В	VHR-50-78®	8¼" x 21" x 19¾"	1/2"	50 FOOT	55



Standard Spring Driven Low Pressure Hose Reels

Keep air hoses off the floor and out of the way. Minimize labor, save storage space, protect against trip hazards and damaged hoses. Maximum pressure is 300 psi / 20 bar. Includes self retracting hose.

Model SHR-P-38-50 is constructed of durable, high quality impact resistant polypropylene. A positive latching mechanism automatically locks hose at a desired length. A safety lock prevents the hose from moving in either direction. An integral wall/overhead swivel bracket and 36" lead hose are included. Maximum temperature is 140° F.

MODEL Number	DESCRIPTION	OVERALL SIZE (W x D x H)	INSIDE HOSE DIAMETER	LENGTH OF HOSE	WEIGHT (POUND)
SHR-P-38-50®	PLASTIC	8¾" x 17½" x 17¼"	3/8"	50 FOOT	23



Air Hose Reel

Help eliminate twists and tangles of hoses, save storage space, protect against trip hazards and damaged hoses with Air Hose Reels. This arm style reel is constructed of all steel. Quick and simple manual hand crank and spring loaded axle helps reel in up to 100 feet of 3/8" hose or 50 feet of 1/2" hose. Valve assembly is rated at 100 psi and 25 cfm. Unit can be mounted both vertically or horizontally. The wall bracket measures 7"W x 3"H. Hose is not included.

MODEL	DESCRIPTION	OVERALL SIZE	USABLE	WEIGHT
NUMBER		(W x D x H)	Space	(POUND)
REEL-16L [®]	ARM STYLE	14" x 17¾" x 18"	5"	14



Electric Cord Reels 115V 1-PHASE STANDARD

Help eliminate the danger of tangled electrical cords with these Electric Cord Reels. The compact design is spring retractable and engineered for industrial use. Complete with 4 foot pigtail and three prong plug. 115V, 60 Hz single phase. Ideal for indoor non-weather tight applications only. UL listed and CSA certified.

Model ECR-45-S comes with a 15 AMP 3 wire single receptacle with clamp type strain relief. *Model ECR-45-D* features a duplex outlet box and ground fault circuit interrupter. Comes with a 20 AMP 3 wire double receptacle.

Model ECR-50 has an incandescent lamp and single receptacle. Head has tool tap, push through winch and metal grounded guard. 75 watt bulb maximum. Bulb not included.

	MODEL Number	DESCRIPTION	CORD LENGTH	WIRE GAUGE	WEIGHT (POUND)
ı	ECR-45-S	SINGLE RECEPTACLE	45 FEET	12	24
ı	ECR-45-D	DOUBLE RECEPTACLE	45 FEET	12	31
I	ECR-50	LAMP WITH RECEPTACLE	50 FEET	16	25

Retractable Cord Reels with Work Lights

A retractable cord reel is the perfect accessory for maintenance areas and general workshops. Retractable cord with spring drive work light included for quick visibility while the steel design shows its strength throughout adverse conditions and surroundings. The unit can be simply mounted for permanent use in the desired location. The included fluorescent light is great for hanging in work areas and using in those hard to reach spots. Available in cord lengths of 35 and 50 feet.

MODEL Number	DESCRIPTION	CORD LENGTH	CORD Gauge	WEIGHT (POUND)
FWLCR-20-18	FLUORESCENT 13 WATT	35 FEET	18	23
FWLCR-25-18	FLUORESCENT 15 WATT	50 FEET	18	24



Tool Balancers

Tool Balancers are the economical choice for balancing tools. The strong, durable construction has a smooth finish with an unyielding ergonomic convenience. Large cable opening for simple connectivity to units minimizes set up and completion times. An adjustable cable with hand winding ability works great for finding a precise tension point and positioning during use. Spring operation - no electricity needed.

MODEL NUMBER	CABLE LENGTH (FEET)	MINIMUM Uniform load	MAXIMUM Uniform load	WEIGHT (POUND)
TBR-1®	4	1 lb.	3 lb.	2
TBR-3	6	1½ lb.	3 lb.	2
TBR-5	6	3 lb.	5 lb.	2
TBR-10	8	5 lb.	10 lb.	7
TBR-12	8	8 lb.	12 lb.	10
TBR-15	8	10 lb.	15 lb.	10
TBR-23	8	16 lb.	23 lb.	10






Warning Sirens

An ideal method to warn people of dangerous situations including: severe weather warnings, emergency circumstances, terror situations, military alerts, and correctional facility alerts. Easy hand crank operation. Type A-E include a convenient carrying bag. Type F-J are easy to install through your local contractors or electricians.

TYPE	MODEL Number	AUDIBLE Distance	TONE	CONSTRUCTION	WEIGHT (POUND)
Α	SIREN-100-P-C®	1/4 MILE	SINGLE	PLASTIC	2
В	SIREN-100-P-GN [®]	1/4 MILE	SINGLE	PLASTIC	2
С	SIREN-100-C®	1/4 MILE	SINGLE	STEEL	4
D	SIREN-100-S®	1/4 MILE	SINGLE	STEEL	4
E	SIREN-100-GN	1/4 MILE	SINGLE	STEEL	2
F	SIREN-100-BM®	1/4 MILE	SINGLE	STEEL	4
G	SIREN-100-TP®	1/4 MILE	SINGLE	STEEL	4
Н	SIREN-120®	1/2 MILE	SINGLE	STEEL	22
I	SIREN-SV®	1/4 MILE	SINGLE	STEEL	6
J	SIREN-SV-AR®	1/4 MILE	SINGLE	STEEL/RED	7



Specialty Wheelbarrows

Ideal for use in both commercial or agricultural settings. Exceptional for use in "green" construction zones and/or maintenance zones. Will not puncture or sink into surfaces that otherwise might be susceptible by metal leg-brace supports. Weight is distributed via 4 wheels, which create a balanced movement of load.

Optional Ergonomic Handles, model WLB-HDL, reduces wrist torque while you manage heavy loads. The patented pivot-point allows the user to carry and lift loads with greater control reducing strain on the wrists, elbows, and lower back. Durable nylon construction.

MODEL Number	CUBIC FEET	WHEEL TYPE	OVERALL SIZE (W x D x H)	WEIGHT (POUND)
WLB4-300	6	PNEUMATIC	59" x 26" x 291/2"	85
WLB4-400	8	PNEUMATIC	60" x 32" x 31½	90
WLB4-500	10	PNEUMATIC	60" x 35" x 34"	94
WLB-HDL		ERGONOMIC HANDLES		



model WLB4-400



Storage Buildings

Modular Storage Buildings are ideal for keeping valuable items secure. Constructed of maintenance free galvanized corrugated paneling. The door measures 45 "W x 74"H usable and features a right-side hinged lock (padlock not included). Modular design is easy to assemble. Once assembled, unit can be moved with a fork lift. Each unit features a wooden floor 534" high to help keep products dry. Built-in rain gutters for water drainage is standard.

MODEL Number	OVERALL SIZE (W x D x H)	USABLE SIZE (W x D x H)	WEIGHT (POUND)
STOR-96-G-W-1RH	109 ¹ / ₁₆ " x 76½" x 84¾"	104¾" x 69¾" x 77 ⁷ /16"	1010
STOR-912-G-W-1RH	109½" x 152 ¹³ /16" x 84 ¹³ /16"	104¾" x 145¾" x 77 ⁷ /16"	1785



Utility Steel Storage Sheds

The Utility Steel Storage Shed are used for holding all kinds of materials or tools. The hinged door provides access to the shed and the slanted roof helps with rain run-off. The shed has an open floor design (floor is not included) and a lockable door latch (padlock not included). Unit has a zinc-plated finish that prevents rust. The easy to assemble design ships knock-down with installation instructions and hardware included. Model SHED-5932-F has a front opening door design that enables the shed to be used in spacious areas, while model SHED-5932 includes a side door design for use in long narrow spaces.

MODEL Number	SIDE OF BUILDING The Door Opens	OVERALL SIZE (W x D x H)	USABLE SIZE (W x H)	WEIGHT (POUND)
SHED-5932	SIDE	60" x 33¾" x 79½"	57" x 75"	128
SHED-5932-F	FRONT	60" x 33¾" x 79½"	57" x 75"	137



Multi-Duty Storage Buildings

Constructed of heavy duty steel these Multi-Duty Storage Buildings stand up in multiple weather conditions; rain, sleet, and snow. The 18 gauge steel roof is contoured for water drainage and will hold snow up to 45 lbs./sq-foot. The sides are constructed of 28 gauge steel siding. Usable size $109\frac{1}{4}$ W x $75\frac{1}{4}$ D x 80 H. Lag down plates are included for securing unit to the concrete. Ships knocked down, assembly required.

MODEL Number	DESCRIPTION	OVERALL SIZE (W x D x H)	WEIGHT (POUND)
MDS-96-DR	SHELTER WITH DOORS	120" x 95½" x 90 ¹ / ₁₆ "	1080
MDS-96-SM	SMOKERS SHELTER	120" x 95½" x 90 ¹ / ₁₆ "	1000
MDS-96-BK	BICYCLE STORAGE SHELTER	120" x 95½" x 90 ¹ /16"	927
AS-125⊕	ANCHOR BOLTS FOR CONCRETE (1	
AS-125-4PK®	ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 5½"	4





Smoking Shelter / Bus Stop

Shelters feature rugged welded steel construction for strength and durability. Side panels are constructed of semi-clear polycarbonate. The top is made from corrugated polycarbonate sheet with a silver baked-in powder coated toughness. Mounting plates included. Heating options available for those cold weather applications, contact factory. Ships knocked down, assembly required.





MODEL Number	USABLE SIZE (W x D x H)	OVERALL SIZE (W x D x H)	WEIGHT (POUND)
SSH-7939-80 [®]	69¾" x 37½" x 77³/16"	76¼" x 49 ⁵ / ₁₆ " x 83 ⁹ / ₁₆ "	270
AS-125⊙	ANCHOR BOLTS FOR (CONCRETE (1) 1/2" x 51/2"	1
AS-125-4PK®	ANCHOR BOLTS FOR (CONCRETE (4) 1/2" x 51/2"	4



LunarGlo LED Light - Option for storage sheds and shelters

An American made solar light unit that has the ability to provide up to 80 hours of light on a single charge. Designed to function even in the toughest of weather conditions. Provides light to insure the safety of people taking a smoke break or waiting for a taxi or mass transit. Easy to install light has no moving parts and is powered by the sun. Includes (4) four ultra bright LED bulbs and a lithium ion battery.

MODEL	OVERALL SIZE			WEIGHT
NUMBER	DESCRIPTION	(W x L x H)	BULB TYPE	(POUND)
LGL-LED	ROOF LIGHT	5½" x 5½" x 3½"	L ED	2



model LGL-LED

Aluminum Smokers Bollard

Manufactured from aluminum alloy for an attractive finish. Includes internal storage container for holding cigarettes. Easy to empty design. Floor-mounted unit includes (4) pre-drilled mounting holes. Wall mounted unit includes hardware.

MODEL Number	DESCRIPTION	HEIGHT	OUTSIDE Diameter	WEIGHT (POUND)
SMK-F-35A®	FLOOR MOUNTED	35"	3¼"	13
SMK-W-19A⊛	WALL MOUNTED	19"	3¼"	4
AS-124-4PK®	ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 4"			4





Driver Cages

Driver Cages are an application that is placed around an entrance in a warehouse. This is used to keep truck drivers, and delivery personnel secluded in one place when entering the warehouse or making a delivery. Each driver cage includes a key lock on the driver side (48" side), a push bar on the warehouse side, and a 2' x 1' 8" slide up service window with shelf. Driver Cage prevents people from wandering throughout the warehouse, getting lost or hurt in the warehouse, as well as additional security. Cages consists of rectangular 2" x 1" mesh, 10 gauge woven wire, and a wet enamel gray finish. Optional colors available, contact factory.

MODEL Number	USABLE SIZE (W x D)	OVERALL SIZE (W x D x H)	WEIGHT (POUND)
2 SIDED DRIVER CAGE			
WPC-D-4X4-2	48" x 48"	52" x 54" x 1011/4"	521
WPC-D-4X6-2	72" x 48"	78" x 54" x 101¼"	576
WPC-D-4X8-2	96" x 48"	102" x 54" x 101¼"	598
3 SIDED DRIVER CAGE			
WPC-D-4X4-3	48" x 48"	52" x 54" x 1011/4"	595
WPC-D-4X6-3	72" x 48"	78" x 54" x 101¼"	639
WPC-D-4X8-3	96" x 48"	102" x 54" x 101¼"	677



model WPC-D-4X6-3



model WPC-10X10-4C



model











Wire Cages

Modular system offers security, storage, and safety for many applications. Stackable panel design allows for easy installation and results in a clean finish, putting this system above the rest. Using wire partitions can save in inventory costs, are more economical alternatives to modular offices and drywall, and can increase safety - all benefits to your business. Constructed of 2" x 2" mesh, 10 gauge welded wire with a powder coat gray finish.

MODEL Number	DESCRIPTION	OVERALL SIZE (W x D x H)	WEIGHT (POUND)
HINGED DOOR TYPE			
WPC-8X8-3NC	3 SIDED, NO CEILING	102" x 100" x 1011/4"	569
WPC-8X8-4NC	4 SIDED, NO CEILING	100" x 100" x 1011/4"	671
WPC-8X8-4C	4 SIDED, W/ CEILING	100" x 100" x 1011/4"	773
WPC-12X12-4NC	4 SIDED, NO CEILING	150" x 150" x 101¼"	854
SLIDING DOOR TYPE			
WPC-10X10-3NC	3 SIDED, NO CEILING	124" x 124" x 1251/4"	759
WPC-10X10-4NC	4 SIDED, NO CEILING	124" x 124" x 1251/4"	867
WPC-10X10-4C	4 SIDED, W/ CEILING	124" x 124" x 125¼"	1001

Shop Desks

Ideal for supervisors, shipping and receiving, or anyone who works on their feet. Sloped top for ergonomic comfort while standing and working. Features roomy writing surface and storage area. Legs are adjustable in 1½" increments. Cabinet unit comes with built-in lock doors and all units come with a lockable drawer. Drawer size is 24"W x 28"D x 3½"H. Units ship knockdown for freight savings.

MODEL Number	DESCRIPTION	OVERALL SIZE (W x D x H)	WEIGHT (POUND)
SHOP-DO®	OPEN SHOP DESK	36 ⁷ /8" x 29 ¹⁵ / ₁₆ " x 54 ³ / ₄ "	120
SHOP-DC®	CABINET SHOP DESK	35½" x 33¾" x 49"	167
SHOP-DW®	WALL MOUNTED DESK	36¾" x 30" x 19½"	92

Visibility Storage Lockers

Visibility lockers provide secure and visible storage for equipment, tools, and other valuable items. Locker sides and front door are made of 8 gauge galvanized welded wire mesh with $1\frac{1}{2}$ " x 3" openings. Door has a padlock hasp (padlock not included). Frame is made of 14 gauge $1\frac{1}{4}$ " x 3/8" c-channel. Roof, back, and bottom panels are made of 14 gauge sheet material. Ships fully assembled.

MODEL Number	OVERALL SIZE (W x D x H)	NUMBER OF Shelves	WEIGHT (POUND)
VSL-3030	30" x 30" x 80"	3	268
VSL-3618	36" x 18" x 80"	3	236
VSL-3624	36" x 24" x 80"	3	266
VSL-3636	36" x 36" x 80"	3	290

Storage Lockers

Whether you need this fully welded storage locker for small package pick up, for employee lockers, or evidence storage will always have an unrestricted view of the interior. Fully assembled and all welded 3 door heavy duty storage lockers. 1½" x 1½" x 1½" x 1/8" angle frame work, 13 gauge shelves, 2"x 1" 10 gauge woven wire mesh sides. Units have 21" between shelves and doors are equipped with separate padlock lugs (Padlock sold separately). 1500 pound total capacity, 500 pounds per shelf when evenly distributed. Unit is painted dark gray. Units are non-returnable.

MODEL Number	OVERALL SIZE (W x D x H)	NUMBER OF Shelves	WEIGHT (POUND)
JVSL-1818	18" x 18" x 75"	3	121
JVSL-2424	24" x 24" x 75"	3	170
JVSL-3030	30" x 30" x 75"	3	216
JVSL-3636	36" x 36" x 75"	3	274

Stainless Steel Lockers

Our 304 Stainless Steel Lockers are the perfect solution for areas prone to rust and sanitation concerns and are ideal for food industry, pool area, and outdoor applications. Ships knocked down, some assembly required. Other styles available, contact factory.

MODEL Number	NUMBER OF COLUMNS	NUMBER OF ROWS	NUMBER Of Lockers	OVERALL SIZE (W x D x H)	WEIGHT (POUND)
LOCK-1218-SSS1*	1	1	1	12" x 18" x 78"	62
LOCK-1818-SSS1**	1	1	1	18" x 18" x 78"	79
LOCK-3618-SSS3	3	1	3	36" x 18" x 78"	168
LOCK-5418-SSS3	3	1	3	54" x 18" x 78"	219
LOCK-1218-SSD1*	1	2	2	12" x 18" x 78"	64
LOCK-1818-SSD1**	1	2	2	18" x 18" x 78"	79
LOCK-3618-SSD3	3	2	6	36" x 18" x 78"	174
LOCK-5418-SSD3	3	2	6	54" x 18" x 78"	219
LOCK-5418-SS31	1	3	3	54" x 18" x 78"	270
LOCK-1218-SS61	1	6	6	12" x 18" x 78"	74
LOCK-1818-SS61	1	6	6	18" x 18" x 78"	96
LOCK-3618-SS63	3	6	18	36" x 18" x 78"	216
LOCK-5418-SS63	3	6	18	54" x 18" x 78"	270
LOCK-CR-12	*12" COAT ROD (available in 1 & 2 rows only)			1	
LOCK-CR-18	**18" C	OAT ROD	(available in	1 & 2 rows only)	2



model LOCK-3618-SSD3



LOCK-3618-SS63

Light Bulb Recycler

The Light Bulb Recycler crushes used fluorescent lamps of any length into 100% recyclable material, while capturing over 99.99% of the vapors released. The system, which is mounted to a 55-gallon drum (not included), can hold up to 1,350 4-foot fluorescent lamps. This unit is equipped with a side-mounted dust filter unit containing the highest quality H.E.P.A. filter available. This works in conjunction with an activated carbon filter located in the steel canister. The activated carbon filter actively captures and neutralizes the mercury vapor released from the lamps during crushing. In addition to providing EPA and OSHA compliance, this unit frees up valuable storage space normally filled with boxes of used lamps and reduces handling and labor costs.

A Permit is required in NJ and MI and an application is required in TX. These states are prohibited from bulb crushing: CA, MN, MO, ME, VT, NH, CT, RI, PA, and WV. Additionally, the nations of Canada, United Arab Emirates, Philippines, South Africa, and Brazil are prohibited too.

LBR-55-UC includes: T12 entry tube, U-Tube chute, combo kit of filters, and entry tube storage rack.

MODEL Number	CRUSHES	WEIGHT (POUND)
LBR-55-UC	STRAIGHT & U-BEND BULBS	127
LBR-T8	OPTIONAL T8 BULB ADAPTOR	3
LBR-T5	OPTIONAL T5 BULB ADAPTOR	3



model LBR-55-UC Drum sold separately

Heavy Duty Electric Fuel Pumps

Heavy duty industrial grade fuel pumps are designed for everyday use in agriculture, construction, automotive, and industrial applications. Rain and weather proof for outdoor applications. Lightweight, yet strong, non-corroding aluminum die cast construction. Geared design makes the pump tolerant to contaminants in fuel. cUL listed motor. Duty cycle: 30 minutes ON / 30 minutes OFF. Recommended use: Gasoline, Diesel, E15 Fuel, Kerosene, Bio Diesel (B20).

MODEL Number	VOLTAGE	FLOW RATE (AT PUMP OUTLET)	INLET / OUTLET	WEIGHT (POUND)
PUMP-HDE-12	12V DC	UP TO 15 GPM	1" NPT / ¾" NPT	30
PUMP-HDE-115	115V AC	UP TO 13 GPM	1" NPT / ¾" NPT	30



HDE series



Heavy Duty High Flow Electric Fuel Pump

Heavy duty industrial grade high flow fuel pump is designed for everyday use in agriculture, construction, automotive, and industrial applications. Rain and weather proof for outdoor applications. Lightweight, yet strong, non-corroding aluminum die cast construction. Geared design makes the pump tolerant to contaminants in fuel. cUL listed motor. Duty cycle: 30 minutes ON / 30 minutes OFF. Recommended use: Gasoline, Diesel, E15 Fuel, Kerosene, Bio Diesel (B20).

MODEL Number	VOLTAGE	FLOW RATE (AT PUMP OUTLET)	INLET / OUTLET	WEIGHT (POUND)
PUMP-HFE-12	12V DC	UP TO 20 GPM	1" NPT / 1" NPT	35



Electric Diesel Pumps


Portable diesel transfer pumps designed for everyday use in agriculture, construction, automotive, and industrial applications. Lightweight, yet strong, non-corroding aluminum die cast construction. Self-priming vane pump design. Base mounted and complete with lift handle. Includes hose barbs and a battery cable. Model PUMP-E-12-ST comes with suction and delivery hoses and a manual fuel control nozzle. Duty cycle: 30 minutes ON / 30 minutes OFF. Recommended use: Diesel, Kerosene.

MODEL		FLOW RATE		WEIGHT
NUMBER	VOLTAGE	(AT PUMP OUTLET)	INLET / OUTLET	(POUND)
PUMP-E-12	12V DC	UP TO 12 GPM	34" NPT / 34" NPT	13
PUMP-E-12-ST	12V DC	UP TO 12 GPM	34" NPT / 34" NPT	17



Continuous Duty Pump

Diesel transfer pump is ideal for use on stationary tanks, fixed fuel transferring systems and dispensers, and other similar industrial applications. Lightweight, yet strong, non-corroding aluminum die cast construction. Self-priming vane pump. Continuous duty cycle with thermal overload protection. Contains a power cord with a US socket. Recommended use: Diesel, Kerosene.





Electric DEF Pumps

Diaphragm transfer pump designed for dispensing DEF. Lightweight non-corroding polypropylene body that is rain and weather proof. Pump has a self-priming design and an inlet & outlet fitting with 3/4 hose barbs. Duty cycle: 30 minutes ON / 30 minutes OFF.

Recommended use: DEF, Adblue, Urea, Water, Antifreeze, Detergents.

Do not use: Diesel, Kerosene, Gasoline, Oils.

	7
model	
PUMP-DEF-115	

MODEL Number	VOLTAGE	FLOW RATE	INLET / OUTLET	WEIGHT (POUND)
PUMP-DEF-12	12V DC	UP TO 9 GPM	34" HOSE BARB	14
PUMP-DEF-115	115V AC	UP TO 9 GPM	34" HOSE BARB	16



Electric Oil Pumps

Heavy duty oil pumps designed specifically to transfer bulk oils, hydraulic oils, antifreeze, or antifreeze mixes. Pump has a non-corroding aluminum die cast body. It also includes an internal bypass valve to bypass flow if discharge pressure exceeds bypass valve setting. Built-in 2" bung adaptor for mounting directly onto drums and tanks. Can also be used to transfer used oil. Just fitting a screen onto the suction tube makes it effective for transferring used oil.

Recommended use: Oils, Synthetic Oils, Antifreeze, Used Oils, Hydraulic Fluids, Cutting Oils, Oil Based Herbicides, Non-flammable Oil Based Solvents, Liquid Soap.

MODEL Number	VOLTAGE	FLOW RATE	INLET / OUTLET	WEIGHT (POUND)
PUMP-EO-115	115V AC	UP TO 4.4 GPM	1" NPT / ¾" NPT	39
PUMP-EO-115-HF*	115V AC	UP TO 8 GPM	1" NPT / ¾" NPT	41
PUMP-EO-12	12V DC	UP TO 3.5 GPM	1" NPT / ¾" NPT	30
*HF = HIGH FLOW				

Sign Stands

Display your signs anywhere. Surface mounted with a weighted base. Includes (3) three holes, 9/16 diameter with 13% diameter counter-bore for permanent mounting of sign. Removable post will accept virtually any sign (signs available, pages B32-B44). Available with or without wheels. Wheels allow you to tip and roll unit. Steel construction with bright zinc finish.

MODEL Number	DESCRIPTION	HEIGHT	BASE Diameter	WEIGHT (POUND)
S-STAND®	NO WHEELS	48"	18"	17
S-STAND-W®	WHEELS INCLUDED	48"	18"	22
AS-125⊚	ANCHOR BOLTS (1) 1	/2" x 5", (3) BOLTS	NEEDED	1

Sign Base Systems

Give your property that brand new look for years to come! Save time on installation and no core drilling or anchor assembly required. Pyramid base can be conveniently rolled out of the way for parking lot maintenance and snow removal. Made with ½" low density polyethylene, which has ultra-violet and anti-static additives for long lasting, maintenance free use. Bases can be filled with concrete, sand, or up to twenty two (22) gallons of water (11½ gallons model OSB). Steel pipe sleeved with high-density thermoplastic included with bases. Supports various signs (pages B32-B44) from "NO PARKING", to "STOP SIGN", and post is removable from base for easy storage.

		-			, 0	
MODEL Number	BASE DIMENSIONS (W x D x H)	WHEELS	OVERALL HEIGHT	POST DIAMETER	COLOR	WEIGHT (POUND)
PYSB-Y	22" x 22" x 22"	NO	98"	1.6"	YELLOW	46
PYSB-R	22" x 22" x 22"	NO	98"	1.6"	RED	46
PYSB-B	22" x 22" x 22"	NO	98"	1.6"	BLUE	46
PYSB-BK	22" x 22" x 22"	NO	98"	1.6"	BLACK	46
PYSB-W-Y	22" x 22" x 22"	YES	98"	1.6"	YELLOW	46
PYSB-W-R	22" x 22" x 22"	YES	98"	1.6"	RED	46
PYSB-W-B	22" x 22" x 22"	YES	98"	1.6"	BLUE	46
PYSB-W-BK	22" x 22" x 22"	YES	98"	1.6"	BLACK	46
OSB-R	8"W side x 20"H base	NO	98"	1.6"	RED	46
OSB-B	8"W side x 20"H base	NO	98"	1.6"	BLUE	46
OSB-GN	8"W side x 20"H base	NO	98"	1.6"	GREEN	46

To Ship





Portable & Permanent Sign Bases

Sign Bases are perfect for parking garages, parking lots, retail establishments, school crossings, and high traffic pedestrian walkways. A lightweight and more durable option to steel, these signs are designed to take vehicle impacts and low speed roll-overs without causing damage to the post or vehicle. The recycled base, series FSP-BASE, is perfect for short term applications or when a rapid deployment is necessary. Permanent sign posts with circular bases can be anchored with ¼" lag bolts (not included). Other post heights and signs are available, contact factory for pricing. For more bases and posts please see *Protective Barriers* section. Signs available on pages B32-B44.

MODEL Number	OVERALL Height	POST DIAMETER	COLOR	WEIGHT (POUND)			
PORTABLE SIGN POSTS	-	DIAMETER	OOLON	(I GOND)			
FSP-24-O	24"	2"	ORANGE	1			
FSP-24-Y	24"	2"	YELLOW	1			
FSP-24-W	24"	2"	WHITE	1			
FSP-36-O	36"	2"	ORANGE	1			
FSP-36-Y	36"	2"	YELLOW	1			
FSP-36-W	36"	2"	WHITE	1			
FSP-48-O	48"	2"	ORANGE	1			
FSP-48-Y	48"	2"	YELLOW	1			
FSP-48-W	48"	2"	WHITE	1			
PORTABLE SIGN POST							
FSP-BASE-L		SE WITH HANDLE (30	,	33			
FSP-BASE-S	SMALL BAS	E WITH NO HANDLI	E (17"W x 18"L x 1"H)	11			
FSP-INSERT	TUBULAR F	1					
PERMANENT SIGN POS	PERMANENT SIGN POSTS WITH CIRCULAR BASE (ANCHOR HARDWARE NOT INCLUDED)						
FSP-24-O-PS	24"	2"	ORANGE	3			
FSP-24-Y-PS	24"	2"	YELLOW	3			
FSP-24-W-PS	24"	2"	WHITE	3			
FSP-36-O-PS	36"	2"	ORANGE	3			
FSP-36-Y-PS	36"	2"	YELLOW	3			
FSP-36-W-PS	36"	2"	WHITE	3			
FSP-48-O-PS	48"	2"	ORANGE	3			
FSP-48-Y-PS	48"	2"	YELLOW	3			
FSP-48-W-PS	48"	2"	WHITE	3			



PORTABLE SIGN POST, model FSP-24-W BASE & INSERT, model FSP-BASE-L TUBULAR FLEX INSERT, model FSP-INSERT



model FSP-BASE-L

model FSP-36-W-PS

Introducing Our NEW Industrial Signage Solutions

About Our Print On Demand Signage Process

Print On Demand allows Vestil to keep fewer, less popular industrial and OSHA signs in stock, further reducing storage space and handling costs. And because your inventory levels can be kept low, Print On Demand helps reduce the chance of being left with product that has become obsolete. With our Print On Demand sign manufacturing process, we are able to react to your demand quickly. Our technology is also environmentally friendly.

Ask Us About Our Unique Two-Sided Bilingual Signage





Many other sign materials are available!

Plastics Metals Reflective Aluminum Glow-in-the-Dark

We Use UV Ink Technology

With the increasing demand for quick turnaround on production runs, Vestil has adapted the use of UV ink devices that were developed specifically for the signage industry. These inks are formulated to cure quickly and offer many years of outdoor durability, as well as resistance to water and abrasion. The inks are applied directly to the substrate, thus eliminating costly additional labor traditionally associated with other sign manufacturing.



Safety Sign Categories

- Chemicals & Haz-Mat
- Entrance & Exit
- Construction
- Fire and Emergency
- Electrical and Many More!

ONLINE CUSTOM

ONLINE CUSTOM DESIGNER

Vestil can affiliate integration to our internet web-to-print solution allowing for direct customization of all types of industrial signage.

OUR SIGNAGE IS MADE TO LAST!



Anti-Graffiti Coating!

Anti-Graffiti is made with Tedlar®, providing an extremely durable polyvinyl fluoride (PVF) film surface for use as an anti-graffiti film. It is washable and resistant to a large number of detergents and solvents. This film provides excellent UV protection. Anti-Graffiti is recommended for both outdoor and indoor applications. UV light inhibitors aid in stopping discoloration from the Sun.

Sign Material Choices



Economy Value

.011 Vinyl Label Decal Sign

For general labeling or extreme conditions; Vinyl labels offer moisture, chemical, and UV resistance making them ideal for labeling indoors. If you're looking for a economical solution that's easy to apply to most surfaces then vinyl adhesive is your answer.



Economy Value .040 Polystyrene Sign

Polystyrene signs are the ideal sign choice for indoor signage. We offer polystyrene signs in .040" gauge thickness. This material is made from a form of plastic and long lasting when used indoors. If your business or school needs indoor signage or directional signage, then polystyrene is the solution.



Standard Value

.040, .063, & .080 Aluminum Sign

Aluminum never rusts. Aluminum withstands wash-downs, harsh elements, abusive conditions, and feature good chemical, abrasion, and impact resistance. Aluminum is excellent for indoor and outdoor usage, making it ideal for a wide variety of industrial strength applications.

- Standard Thicknesses are .040", .063", & .080"
- Protected by UV resistant clear Anti-Grafitti coating!
- Withstands harsh cleanings
- Endures outdoor environmental conditions
- Service temperature range -40° to 250°F
- Signs are round cornered and provided with holes for mounting
- Signage Exterior long-term application life



Our safety signs are available in all popular sizes including oversized, colors, or shapes. Vestil assures that all signs will exceed consumer expectations. All of our signs are imaged using our state-of-the-art Print On Demand process with UV inks that won't dissolve or fade over time.

Anti-Graffiti UV laminate

is applied over the surface of all our aluminum constructed signs to prevent fading & increase longevity. Also available as a option on other available materials.

Our categories of signs include safety signs, security signs, first aid signs, safety banners, and many more.

You can get all of the signage you'll ever need to hang throughout your warehouse and facility including ANSI signs, OSHA signs, warning signs, danger signs, caution signs, notice signs, and more.






Premium Value .130 Aluminum (ACM) Sign

Aluminum composite material (ACM) is comprised of two pre-painted sheets of .130" aluminum with a solid polyethylene core. Provides excellent durability in outdoor applications, is lightweight, and is approximately one half the weight of our aluminum signs. Won't bow or warp. Interior or exterior long-term application life. Made In USA.

With Anti-Grafitti coating!





NOTICE SAFETY SIGNAGE OUR MOST POPULAR REQUESTED Signs!

NOTICE **ADMITTANCE**

SI-N-01



NOTICE Model Number Format:

(sign #) - (size) - (material)

Example: SI-N-01-A-AL-040

When ordering your signage follow these steps:

STEP 1 - Select your sign number.

STEP 2 - Select your size:

(A) 10.5" x 7.5" (C) 14.5" x 10.5" (B) 12.5" x 9.5"

(D) 18.5" x 12.5" (E) 20.5" x 14.5"

STEP 3 - Select your material:

(AL-040) .040" Aluminum Sign (AL-063) .063" Aluminum Sign (AL-080) .080" Aluminum Sign

(AC-130) .130" Aluminum Composite (ACM) Sign

(PS-040) .040" Polystyrene Sign (LB-011) .011" Vinyl Label Decal Sign

All signs will receive installation kits.



NOTICE NO SOLICITATION

NOTICE **NOT AN ENTRANCE** NOTICE NO **PARKING**

SI-N-02

SI-N-03

SI-N-04 SI-N-05

NO ALCOHOL OR DRUGS ALLOWED ON THESE PREMISES

SI-N-06

NO ALCOHOL OR DRUGS PERMITTED ON PROPERTY INCLUDING PARKING LOT

SI-N-07

NOTICE

DRIVERS CHOCK YOUR WHEELS

SI-N-08

NOTICE

DRIVERS **CHOCK YOUR WHEELS**

SI-N-09

NOTICE **KEEP DOOR** CLOSED

SI-N-10

NOTICE

DO NOT BLOCK DOOR

SI-N-11

OTICE

SECURITY BADGE MUST BE WORN AT ALL TIMES

SI-N-12

NOTICE

THIS IS A DRUG-FREE WORKPLACE

SI-N-13

NOTICE

NO ALCOHOLIC BEVERAGES

SI-N-14

NOTICE

AUTHORIZED EMPLOYEE PARKING ONLY

SI-N-15

NOTICE AIR PRESSURE

30 P.S.I. FOR CLEANING PARTS AND EQUIPMENT

SI-N-16

NO ALCOHOL OR DRUGS PERMITTED ON COMPANY PREMISES

SI-N-17

THIS AREA IS UNDER

24 HOUR TV SURVEILLANCE TRESPASSERS WILL BE PROSECUTED

SI-N-18

NOTICE

CUSTOMERS NOT PERMITTED IN **WORKING AREA**

SI-N-19

WHEELS MUST BE CHOCKED BEFORE LOADING **OR UNLOADING**

SI-N-20

COMPANY IS NOT RESPONSIBLE FOR LOSS OR DAMAGE TO PARKED CARS

SI-N-21

NOTICE

EMPLOYEE ENTRANCE ONLY

SI-N-22

THE USE OF LIQUOR

ON THESE PREMISES WILL MEAN IMMEDIATE DISMISSAL

SI-N-23

THIS AREA UNDER SURVEILLANCE

SI-N-24

AUTHORIZED DRIVERS ONLY ARE ALLOWED TO **OPERATE LIFT TRUCKS**

SI-N-25

NOTICE

ALL VISITORS MUST REGISTER AT OFFICE

SI-N-26

NOTICE

CERTIFIED FORKLIFT OPERATORS ONLY

SI-N-27

NOTICE NOT AN EXIT

SI-N-28

NOTICE

DO NOT PARK IN FRONT OF DOOR

SI-N-29

NOTICE

PARKING AREA UNDER CAMERA SURVEILLANCE AND SECURITY PATROLS

SI-N-30

NOTICE

UNAUTHORIZED
PERSONS
NOT PERMITTED
BEYOND THIS POINT

SI-N-31

NOTICE

VISITORS MUST CHECK IN WITH SECURITY

SI-N-32

NOTICE

ALL VISITORS MUST GET PASS AT OFFICE

SI-N-33

NOTICE

THESE PREMISES
PROTECTED BY
CLOSED CIRCUIT TV

SI-N-34

NOTICE

THIS PROPERTY PROTECTED BY ELECTRONIC SURVEILLANCE

SI-N-35

NOTICE

NO TRESPASSING

SI-N-36

NOTICE

NO SMOKING

SI-N-37

NOTICE



SI-N-38

NOTICE

FOR SECURITY REASONS INDIVIDUALS ENTERING OR LEAVING THE PREMISES MAY BE SUBJECT TO SEARCH

SI-N-039

NOTICE

TRESPASSERS WILL BE PROSECUTED

SI-N-40

NOTICE

NO GUNS,KNIVES OR WEAPONS ALLOWED ON PREMISES

SI-N-41

NOTICE

YOU WILL BE SUBJECT TO SEARCH

SI-N-42

NOTICE

NO FOOD OR DRINK IN THIS AREA

SI-N-43

NOTICE

MAINTENANCE PERSONNEL ONLY

SI-N-44

NOTICE

SAFETY EQUIPMENT STORED HERE

SI-N-45

NOTICE

CELL PHONES AND ELECTRONIC DEVICES NOT PERMITTED

SI-N-46

NOTICE



KEEP ALL CYLINDERS CHAINED

SI-N-47

NOTICE



SI-N-48

NOTICE

SAFETY GLASSES REQUIRED

SI-N-49

NOTICE

THIS ELEVATOR IS FOR FREIGHT ONLY NOT FOR PASSENGERS

SI-N-50

NOTICE

SECURITY ALARM WILL SOUND IF DOOR IS OPENED

SI-N-51

OTICE NOT

FORKLIFT SAFETY HARNESS MUST BE USED AT ALL TIMES

SI-N-52

NOTICE

FOLLOW
FALL PROTECTION
GUIDELINES
WHEN WORKING
BEYOND THIS POINT

SI-N-53

NOTICE

DO NOT ENTER EMPLOYEES ONLY

SI-N-54

NOTICE

CHEMICAL GOGGLES MUST BE WORN BEYOND THIS POINT

SI-N-55

NOTICE

THIS DOOR TO REMAIN UNLOCKED DURING BUSINESS HOURS

SI-N-56

NOTICE

NO ANIMALS ALLOWED

SI-N-57

NOTICE

EMPLOYEES MUST WASH HANDS BEFORE RETURNING TO WORK

SI-N-58

NOTICE

MICROWAVE OVEN IN USE

SI-N-59

NOTICE

ALL VISITORS AND EMPLOYEES SUBJECT TO METAL DETECTOR SCREENING

SI-N-60

NOTICE

TEMPORARILY OUT OF SERVICE

SI-N-61

NOTICE

NO ADMITTANCE WITHOUT A PERMIT

SI-N-62

NOTICE

DRUMS MUST BE LABELED

SI-N-63

NOTICE

UNAUTHORIZED PERSONS KEEP OUT

SI-N-64

NOTICE VEHICLES ARE

SUBJECT TO SEARCH

SI-N-65

NOTICE

TORNADO SHELTER

SI-N-66

NOTICE

DO NOT PARK PERSONAL VEHICLES ON SITE

SI-N-67

NOTICE

NO TRESPASSING ON THIS PROPERTY UNDER PENALTY OF THE LAW

SI-N-68

NOTICE

NO VEHICLES BEYOND THIS POINT

SI-N-69

NOTICE

CLEAN MACHINE AFTER USE

SI-N-70

DANGER SAFETY SIGNAGE

OUR MOST POPULAR REQUESTED Signs!



SI-D-01

DANGER Model Number Format:

(sign #) - (size) - (material)

Example: SI-D-01-E-LB-011

When ordering your signage follow these steps:

STEP 1 - Select your sign number.

STEP 2 - Select your size:

New

(A) 10.5" x 7.5" (C) 14.5" x 10.5" (B) 12.5" x 9.5" (D) 18.5" x 12.5" (E) 20.5" x 14.5"

STEP 3 - Select your material:

(AL-040) .040" Aluminum Sign (AL-063) .063" Aluminum Sign (AL-080) .080" Aluminum Sign

(AC-130) .130" Aluminum Composite (ACM) Sign

(PS-040) .040" Polystyrene Sign (LB-011) .011" Vinyl Label Decal Sign

All signs will receive installation kits.









SI-D-03 SI-D-04 SI-D-02 SI-D-05



SI-D-06



SI-D-07



SI-D-08



SI-D-09





SI-D-11



SI-D-12



SI-D-13

DANGE



SI-D-14

DANGE

FLAMMABLE

LIQUIDS

SI-D-19



SI-D-15

DANGE

FLAMMABLE

GAS

SI-D-20



SI-D-16





DANGE ELECTRICAL HAZARD

DANGE HIGH VOLTAGE (240 VOLTS)

DANGE HIGH RADIATION **AREA AUTHORIZED** PERSONNEL ONLY

SI-N-25



SI-D-21



SI-D-22





THIS MACHINE **UNLESS AUTHORIZED**

SI-D-26



SI-D-27



SI-D-28



SI-D-29



SI-D-30



DO NOT CLIMB SIT. WALK OR RIDE ON CONVEYOR

SI-D-31



SI-D-33



SI-D-34



SUPPLIES BEFORE SERVICING SI-D-35



SI-D-36



SI-D-32

SI-D-37



SI-D-38



SI-D-39



SI-D-40



SI-D-41



SI-D-42



SI-D-43



SI-D-44



SI-D-45



SI-D-46



SI-D-47



Area In Front Of Electrical Panel Must Be Kept Clear For 36"

SI-D-48



SI-D-49



SI-D-50



SI-D-51



ACID WEAR PROTECTIVE **EQUIPMENT**



SI-D-52



SI-D-53



SI-D-54



SI-D-55



SI-D-56



SI-D-57



SI-D-58



SI-D-59



SI-D-60



SI-D-61



SI-D-62



SI-D-63



SI-D-64



SI-D-65



TO AUTHORIZED PERSONNEL ONLY

SI-D-66



SI-D-67







SI-D-69 SI-D-70



SI-D-68

WARNING SAFETY SIGNAGE OUR MOST POPULAR REQUESTED Signs!



SI-W-01



WARNING Model Number Format:

(sign #) - (size) - (material)

Example: SI-W-01-C-PS-040

When ordering your signage follow these steps:

STEP 1 - Select your sign number.

STEP 2 - Select your size:

(A) 10.5" x 7.5" (B) 12.5" x 9.5" (C) 14.5" x 10.5" (D) 18.5" x 12.5" (E) 20.5" x 14.5"

STEP 3 - Select your material:

(AL-040) .040" Aluminum Sign (AL-063) .063" Aluminum Sign

(AL-080) .080" Aluminum Sign

(AC-130) .130" Aluminum Composite (ACM) Sign

(PS-040) .040" Polystyrene Sign (LB-011) .011" Vinyl Label Decal Sign

All signs will receive installation kits.





WARNING KEEP OFF



SI-W-04 SI-W-05



SI-W-06



SI-W-07



SI-W-08



SI-W-09



SI-W-10



SI-W-11



SI-W-12

WARNING



SI-W-13

WARNING

WEAR APPROVED

BREATHING

APPARATUS

IN THIS AREA

SI-W-18



SI-W-14



SI-W-15



SI-W-16

VARNING

THIS DOOR IS NOT FOR

PLEASE USE

MAIN ENTRANCE



WARNING
TRIPPING **
HAZARD

WARNING TRESPASSERS WILL BE PROSECUTED



SI-W-19





SI-W-20



SI-W-21 SI-W-22

SI-W-23

SI-W-24 SI-W-25



SI-W-26



SI-W-27



SI-W-28



SI-W-29



SI-W-30



SI-W-31



SI-W-32



SI-W-33



SI-W-34



SI-W-35



SI-W-36



SI-W-37



SI-W-38



SI-W-39



SI-W-40



SI-W-41



SI-W-42



SI-W-43



SI-W-44



SI-W-45



SI-W-46



SI-W-47



SI-W-48



SI-W-49



SI-W-50



SI-W-51



SI-W-52



SI-W-53



SI-W-54



SI-W-55



SI-W-56



SI-W-57



SI-W-58



SI-W-59



SI-W-60



SI-W-61



SI-W-62



SI-W-63



SI-W-64



SI-W-65



SI-W-66



KEPT CLOSED

SI-W-67



WARNING DO NOT ENTER WHEN LIGHT IS ON

SI-W-69



SI-W-70

CAUTION SAFETY SIGNAGE

OUR MOST POPULAR REQUESTED Signs!



SI-C-01

CAUTION Model Number Format:



(sign #) - (size) - (material)

Example: SI-C-01-B-AC-130

When ordering your signage follow these steps:

STEP 1 - Select your sign number.

STEP 2 - Select your size:

(A) 10.5" x 7.5" (B) 12.5" x 9.5" (C) 14.5" x 10.5" (D) 18.5" x 12.5" (E) 20.5" x 14.5"

STEP 3 - Select your material:

(AL-040) .040" Aluminum Sign (AL-063) .063" Aluminum Sign (AL-080) .080" Aluminum Sign

(AC-130) .130" Aluminum Composite (ACM) Sign

(PS-040) .040" Polystyrene Sign (LB-011) .011 Vinyl Label Decal Sign

All signs will receive installation kits.

CAUTIO OPEN SLOWLY

SI-C-02

CAUTION SOUND HORN

SI-C-03



SI-C-04



SI-C-05



SI-C-06

UNAUTHORIZED PERSONNEL KEEP OUT

SI-C-07

PEDESTRIAN TRAFFIC SOUND HORN

SI-C-08



SI-C-09



SI-C-10

ENTER THROUGH OTHER DOOR

SI-C-11

RESTRICTED AREA

SI-C-12

DOOR OPENS OUTWARD

SI-C-13

CAUTION

NO

PARKING

SI-C-18



SI-C-14

NO

ADMITTANCE

SI-C-19



SI-C-15

MOVING

TRAFFIC

SI-C-20

NO SMOKING BATTERY CHARGING AREA

SI-C-16

WFT MICROWAVE IN USE PAINT

> SI-C-21 SI-C-22



SI-C-17



MICROWAVE OVEN COULD BE HARMFUL

SI-C-23

PACEMAKERS

RADIOACTIVE **EQUIPMENT** IN THIS AREA

SI-C-24

DO NOT OPERATE MACHINE WITHOUT **GUARDS IN PLACE**

SI-C-25

CAUTION LOW CEILING

SI-C-26

POWERED INDUSTRIAL TRUCKS SI-C-27

CAUTION

LOOK OUT FOR

CAUTION LIFT TRUCKS GO SLOW

SI-C-28

CAUTION LIFELINE REQUIRED

SI-C-29



SI-C-30



SI-C-31



SI-C-33



SI-C-34



SI-C-35

KEEP AISLE CLEAR AT ALL TIMES

SI-C-36




SI-C-37



HOT SURFACE DO NOT TOUCH

SI-C-38



HIGH INTENSITY ULTRAVIOLET LIGHT WEAR EYE PROTECTION

SI-C-39



SI-C-40

HIGH NOISE

EAR PROTECTION REQUIRED

SI-C-41

HEARING PROTECTION REQUIRED

SI-C-42

HARD HAT AREA

SI-C-43

HAZARDOUS MATERIAL

SI-C-44

HAZARDOUS AREA AUTHORIZED PERSONNEL ONLY

SI-C-45

HARD HAT AND SAFETY GLASSES REQUIRED IN THIS AREA

SI-C-46

RADIOACTIVE MATERIALS

SI-C-47

IITIO

WATCH FOR FORKLIFT TRAFFIC

SI-C-48

GO SLOW SOUND HORN

SI-C-49

KEEP GATE CLOSED

SI-C-50

FLOOR SLIPPERY WHEN WET

SI-C-51

AUTION

FALLING ICE

SI-C-52

SAFETY BELT **MUST BE** WORN

SI-C-53

UTIO

EYE AND EAR PROTECTION REQUIRED IN THIS AREA

SI-C-54

CAUTIO DOOR SWINGS

INWARD SI-C-55

SLIPPERY FLOOR

SI-C-56

CAUTION

EMPLOYEES ONLY

SI-C-57

DO NOT DRIVE FORKLIFT WITH FORKS RAISED

SI-C-58

THIS DOOR MUST BE KEPT CLOSED

SI-C-59

DO NOT OPEN **ALARM WILL** SOUND

SI-C-60

DO NOT ENTER

SI-C-61

CONTRACTOR PERSONNEL

ONLY SI-C-62

CONSTRUCTION AREA WATCH FOR MOVING EQUIPMENT

SI-C-63

CONSTRUCTION ZONE

SI-C-64

CONSTRUCTION AREA AUTHORIZED PERSONNEL ONLY

SI-C-65

CLOSE DOOR WHEN NOT IN USE

SI-C-66

THESE DOORS CLOSE AUTOMATICALLY

SI-C-67

SI-C-68

MAKE SURE THAT WHEEL CHOCKS ARE REMOVED AND STOWED

SI-C-69

CHEMICAL GOGGLES REQUIRED IN THIS AREA

SI-C-70

CAUTION SAFETY SIGNAGE

MOST POPULAR REQUESTED Signs!





AUTHORIZED PERSONNEL ONLY

SI-C-72



SI-C-73



SI-C-74



SI-C-75





AREA UNDER CONSTRUCTION

SI-C-78



SI-C-79



SI-C-80



FREE **CUSTOMIZATION** ON ALL

OUR SIGNS!

Every sign shown on these catalog pages can be repurposed with our online sign builder. Visit myvsigns.com to learn how.

We make it easy by providing hundreds of templates for you and allowing you to simply modify the artwork however you choose.

We also have a large library of safety pictographs for your use on your sign design for any application or work environment.



Our Online Store Is Like No Other!

Model Number Format:

SI - (type - C, D, W, N) - (sign #) - (size) - (material)

Example: SI-C-01-B-AC-130

Industrial Signage Ordering Information

All signs will receive installation kits.

When ordering your signage follow these steps:

STEP 1 - Select your sign number.

STEP 2 - Select your size:

(A) 10.5" x 7.5" (B) 12.5" x 9.5" (C) 14.5" x 10.5"

(D) 18.5" x 12.5" (E) 20.5" x 14.5"

STEP 3 - Select your material:

(AL-040) .040" Aluminum Sign

(AL-063) .063" Aluminum Sign

(AL-080) .080" Aluminum Sign

(AC-130) .130" Aluminum Composite (ACM) Sign

(PS-040) .040" Polystyrene Sign

(LB-011) .011" Vinyl Label Decal Sign

UTION / DANGER / WARNING / NOTICE	(A) 10.5" x 7.5" (B) 12.5" x 9.5" (C) 14.5" x 10.5" (D) 18.5" x 12.5" (E) 20.5" x 14.5" (A) 10.5" x 7.5"	1 2 3 4 4
UTION / DANGER / WARNING / NOTICE	(B) 12.5" x 9.5" (C) 14.5" x 10.5" (D) 18.5" x 12.5" (E) 20.5" x 14.5" (A) 10.5" x 7.5"	2 3 4 4
UTION / DANGER / WARNING / NOTICE	(C) 14.5" x 10.5" (D) 18.5" x 12.5" (E) 20.5" x 14.5" (A) 10.5" x 7.5"	3 4 4
UTION / DANGER / WARNING / NOTICE	(D) 18.5" x 12.5" (E) 20.5" x 14.5" (A) 10.5" x 7.5"	4
UTION / DANGER / WARNING / NOTICE	(E) 20.5" x 14.5" (A) 10.5" x 7.5"	4
UTION / DANGER / WARNING / NOTICE UTION / DANGER / WARNING / NOTICE UTION / DANGER / WARNING / NOTICE	(A) 10.5" x 7.5"	
UTION / DANGER / WARNING / NOTICE UTION / DANGER / WARNING / NOTICE	` '	
UTION / DANGER / WARNING / NOTICE UTION / DANGER / WARNING / NOTICE	` '	
UTION / DANGER / WARNING / NOTICE	(B) 12 5" × 0 5"	1
	(B) 12.5" x 9.5"	2
UTION / DANGER / WARNING / NOTICE	(C) 14.5" x 10.5"	3
	(D) 18.5" x 12.5"	4
UTION / DANGER / WARNING / NOTICE	(E) 20.5" x 14.5"	4
UTION / DANGER / WARNING / NOTICE	(A) 10.5" x 7.5"	1
UTION / DANGER / WARNING / NOTICE	(B) 12.5" x 9.5"	2
UTION / DANGER / WARNING / NOTICE	(C) 14.5" x 10.5"	3
UTION / DANGER / WARNING / NOTICE	(D) 18.5" x 12.5"	4
UTION / DANGER / WARNING / NOTICE	(E) 20.5" x 14.5"	4
PROTECTION	(L) 20.0 X 14.0	7
UTION / DANGER / WARNING / NOTICE	(A) 10.5" x 7.5"	1
UTION / DANGER / WARNING / NOTICE	(B) 12.5" x 9.5"	2
UTION / DANGER / WARNING / NOTICE	(C) 14.5" x 10.5"	3
UTION / DANGER / WARNING / NOTICE		4
		4
	(-)	-
UTION / DANGER / WARNING / NOTICE	(A) 10.5" x 7.5"	1
UTION / DANGER / WARNING / NOTICE	(B) 12.5" x 9.5"	2
UTION / DANGER / WARNING / NOTICE	(C) 14.5" x 10.5"	2
UTION / DANGER / WARNING / NOTICE	` '	3
UTION / DANGER / WARNING / NOTICE		4
UTION / DANGER / WARNING / NOTICE	(A) 10.5" x 7.5"	1
UTION / DANGER / WARNING / NOTICE	(B) 12.5" x 9.5"	1
UTION / DANGER / WARNING / NOTICE	(C) 14.5" x 10.5"	1
UTION / DANGER / WARNING / NOTICE	(D) 18.5" x 12.5"	2
ITION / DANGER / WARNING / NOTICE		2
֡	UTION / DANGER / WARNING / NOTICE SIVE)** UTION / DANGER / WARNING / NOTICE	UTION / DANGER / WARNING / NOTICE (D) 18.5" x 12.5"

^{*}Specify sign type ("C" Caution, "D" Danger, "W" Warning or "N" Notice).

^{**}Vinyl label adhesive is permanent and adheres to most smooth clean surfaces, indoor or outdoor applications.

Signs are provided with four (4) .25 inch diameter punched holes located in corners for mounting (labels not included). Other configurations available.

SAFETY SIGNAGE How to Order - It's Simple!



Available Materials

.040" Coated Aluminum - It's a flat, rigid metal substrate that is lightweight with a baked enamel finish made to withstand the elements for long-term outdoor and indoor use. Our custom aluminum signs are also available in many standard sizes and colors. Our custom aluminum signs are generally used for commercial, industrial, informational, and directional signage. It can be used with many different frame systems and will not rust.

.040" Polystyrene - Is one of the most widely used plastics. It is a rigid sheet of plastic. It is durable, low moisture resistance, and has good impact strength. Uses: Long-term indoor or short-term outdoor uses.

3 mm Premium Composite Aluminum (ACM) - A lightweight aluminium composite 3mm board, which is flat and rigid making it ideal for signage, display, presentation, and point of sale applications. It is corrosion resistant and very stable to changes in temperature, making it ideal for outdoor signage. The black core is UV stable and will not warp or delaminate.

Vinyl Pressure Sensitive label - Our least expensive option. Can be used on any clean smooth surface, indoor or outdoor applications.



All of our OSHA basic signs come in extended sizes so you get the most from your space and purchase.





Each sign is carefully manufactured to ensure long-life.



Don't see what you want exactly, visit us online at www.myvsigns.com to CUSTOMIZE ALL of these messages or choose and customize from hundreds of others designs!