

Double Ended Cables for Weld Cells

M8 Male Straight to M8 Female Straight, 3-wire TPE, 3-pin, 3-wire



Part Number	Description
C-MS3TZ-T070.3+C-FS3TZ-T070.3-S	M8 Male Straight to M8 Female 3-Pin TPE with Silicone Protection 0.3M Length
C-MS3TZ-T070.6+C-FS3TZ-T070.6-S	M8 Male Straight to M8 Female 3-Pin TPE with Silicone Protection 0.6M Length
C-MS3TZ-T071+C-FS3TZ-T071-S	M8 Male Straight to M8 Female 3-Pin TPE with Silicone Protection 1M Length
C-MS3TZ-T072+C-FS3TZ-T072-S	M8 Male Straight to M8 Female 3-Pin TPE with Silicone Protection 2M Length
C-MS3TZ-T075+C-FS3TZ-T075-S	M8 Male Straight to M8 Female 3-Pin TPE with Silicone Protection 5M Length

M12 Male Straight to M12 Female Straight TPE Bright LED, 4-pin, 3-wire


Part Number	Description
R-MS4TZ-T070.3 + R-FS4/3TP-T070.3-S	M12 Male Straight to M12 Female Straight 4-Pin TPE with Silicone Protection & Bright LED, 0.3M Length
R-MS4TZ-T070.6 + R-FS4/3TP-T070.6-S	M12 Male Straight to M12 Female Straight 4-Pin TPE with Silicone Protection & Bright LED, 0.6M Length
R-MS4TZ-T071 + R-FS4/3TP-T071-S	M12 Male Straight to M12 Female Straight 4-Pin TPE with Silicone Protection & Bright LED, 1M Length
R-MS4TZ-T072 + R-FS4/3TP-T072-S	M12 Male Straight to M12 Female Straight 4-Pin TPE with Silicone Protection & Bright LED, 2M Length
R-MS4TZ-T075 + R-FS4/3TP-T075-S	M12 Male Straight to M12 Female Straight 4-Pin TPE with Silicone Protection & Bright LED, 5M Length



Specification


Connection	M8
Application Class	HNE acc. to DIN 40040 (-25°C / +90°C/ 75% RH)
Pin Material	Gold-plated Brass
Molded Body	TPU, self extinguising
O-ring	Viton
Threaded Connector	Nickel-plated Brass
Operating Voltage	300 VDC
Nominal Power	4A
Nominal Voltage	60VAC/75VDC (10-30 VDC for LED models)
Test Voltage	1.5 KV eff./60s
Insulation	Insulation Group: C acc. to VDE 0110, Insulation Resistance: >109
Protection	IP67 (IP65 for snap-in models)

3 Pin

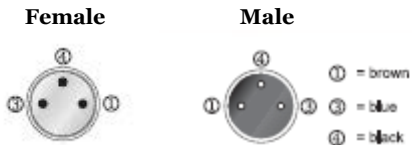


Straight	Female	C-FS3TZ-V075
Straight	Male	C-MS3TZ-V075
90°	Female	C-FA3TZ-V075
90°	Female	C-FA3TN-V075 (NPN with LED)
90°	Female	C-FA3TP-V075 (PNP with LED)
90°	Male	C-MA3TZ-V075

4 Pin



Straight	Female	C-FS4TZ-V075
Straight	Male	C-MS4TZ-V075
90°	Female	C-FA4TZ-V075
90°	Male	C-MA4TZ-V075

Straight

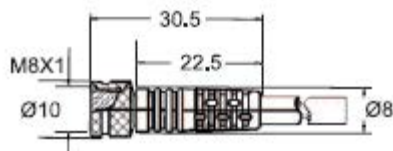

90 Degree

