CNC DUAL COILING POINT MACHINE



NORIIMEC

ORIIMEC CORPORATION OF AMERICA 1840 AIRPORT EXCHANGE BLVD. #200 ERLANGER, KY 41018 USA 1.888.746.3320 www.oriimec.com

WW.ORIIMEC.COM

# WH-8

## CNC DUAL COILING POINT MACHINE

#### **FEATURES**

- 5-axis: Feed, Cut, Wedge Pitch, Push Pitch & Point equipped as standard specifications.
- Minimized overhang of tooling gives high accuracy and durability.
- · Graduating adjustment points enhances repeatability.

#### STANDARD ACCESSORIES


- Disk type wire straightener
- Handy Pulse Dialer
- SCD Sensor
- Sorter/Dump

#### OPTIONAL ACCESSORIES

- · Axis-controlled left-hand wind unit
- Initial tension servo

#### CNC DEVICE

"MNO": Mec's new Windows-based operating system.

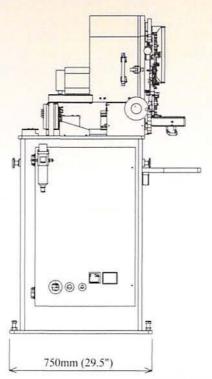

### MACHINE SPECIFICATIONS

| Wire Diameter        | 0.1 - 0.8mm (004"-0.031"   |
|----------------------|--|
| Max Outer Diamter    | 28mm (1.102")  |
| D/d                  | 4  |
| Feed Axis            |  |
| Resolution           | 0.001mm  |
| Max Speed            | 188m/min   |
| Motor                | 900W   |
| Cut Axis             |  |
| Resolution           | 0.001°   |
| Motor                | 750W   |
| Wedge Pitch Axis     |  |
| Resolution           | 0.001mm  |
| Motor                | 400W   |
| Push Pitch Axis      |  |
| Resolution           | 0.001mm  |
| Motor                | 400W   |
| Point Axis           |  |
| Resolution           | 0.001mm  |
| Motor                | 400W   |
| Power Source         | AC 200V, 3 phase, 15A  |
| Service Air Pressure | 0.5 Mpa  |
|                      | A CONTRACTOR OF THE CONTRACTOR |

Specifications subject to change without notice.

