




WIRE HANDLING EQUIPMENT

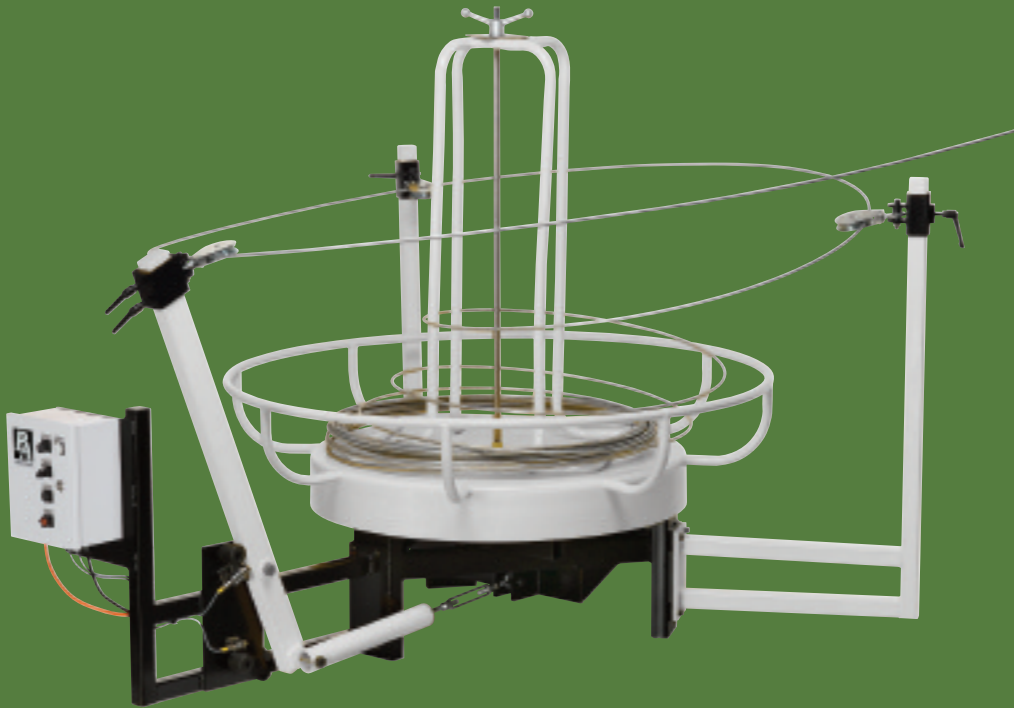

WIRE HANDLING EQUIPMENT

USA

Metric



Wire Cut-To-Length

P/A's Cut-To-Length Straightens, Feeds and Shears to your Programmable Length

Wire Diameter
No. Feed Rolls
Feed Roll Dia.

.040 – .750 Inch
2 – 6
2.56 – 4.72 Inch

1,0 – 19,1 mm
2 – 6
65,0 – 120,0 mm



Wire Feed and Straightener Combination. Choose a Wire Feed and Straightener for your application

Consult Factory

Consult Factory

Consult Factory



Tangent Servo Wire Feed

Feeds come in a choice of 1,2, or 3 modules

Wire Dia.
Pulling Power
Roll Dia.

.040 – .275 Inch
330 – 990 Lb.
2.56 Inch

1,0 – 7,0 mm
1470 – 4405 N
65,0 mm



HD Tangent Servo Wire Feed

Feeds come in a choice of 1,2, or 3 modules with larger roll diameter

Wire Dia.
Pulling Power
Roll Dia.

.040 – .750 Inch
660 – 1940 Lb.
4.72 Inch

1,0 – 18,75 mm
2937 – 8811 N
120,0 mm



Collared Servo Wire Feed

Feeds up to 3 different diameters of wire

Feed Roll Dia.
Max. Wire Dia.

1.77 Inch
0.125 Inch

45,0 mm
3,2 mm



Pneumatic Wire Feed

Feeds wire smoothly and accurately

Pulling Power
Wire Sizes - AX
Wire Sizes - CX

113 / 39 Lb.
.014 – .059 Inch
.036 – .132 Inch

504 / 172 N
0,35 – 1,50 mm
0,90 – 3,35 mm



Standard Wire Straightener

Designed for rugged conditions of wire mills

Wire Capacity
Horizontal Rolls
Vertical Rolls

.003 – .500 Inch
5 – 14
5 – 10

0,08 – 12,70 mm
5 – 14
5 – 10



Modular Wire Straightener

Handles different wire configurations

Wire Capacity
Horizontal Rolls
Vertical Rolls

.004 – .591 Inch
5 – 11
5 – 11

0,1 – 15,0 mm
5 – 11
5 – 11



Wire Payoff

Wire Palletizer offers easy, safe loading of the wire spool and smooth, controlled payoff of your wire stock

Max. Coil Wt.
Wire Diameter
Table Speed

10,000 Lb.
.005 – .156 Inch
3 – 24 RPM

4500 Kg
0,127 – 3,96 mm
3 – 24 RPM




Heavy Duty Wire Palletizer

Smooth, payoff of thicker wire

Max. Coil Wt.
Wire Diameter
Table Speed

10,000 Lb.
.030 – .375 Inch
3 – 24 RPM

4500 Kg
0,76 – 9,35 mm
3 – 24 RPM



Wire Traverse Spool Reel

Unwinds oscillate wound material

Max. Coil Wt.
Max. Spool OD

3000 Lb.
40 Inch

1360 Kg
1000 mm



Wire Shear - Pneumatic or Hydraulic

Max. Wire Dia.

.630 Inch

16,0 mm



Traverse Layer Winder

Designed to wind wire or strips in a traversing, side-to-side manner

Max. Spool Width
Spool Dia.
Reel Shaft Dia.

Consult Factory

Consult Factory



WWW.PA.COM

P/A Industries Inc.

522 Cottage Grove Road ▪ Bloomfield, CT 06002-3191 USA

Phone: +1.860.243.8306 ▪ Fax: +1.860.242.4870 ▪ E-Mail: sales@pa.com