


Mold & Die Polishing
Equipment & Supplies



ENGIS DI-PROFILER

NEW AIR DRIVEN-HIGH FREQUENCY POLISHING MACHINE

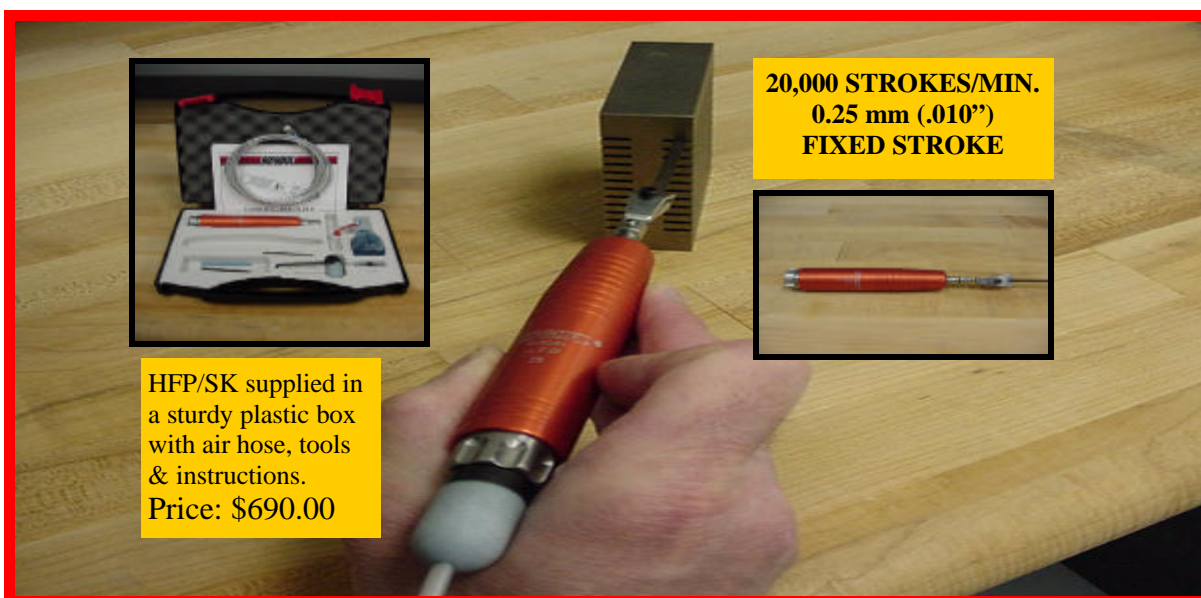

20,000 STROKES/MIN.
0.25 mm (.010")
FIXED STROKE

HFP/SK supplied in a sturdy plastic box with air hose, tools & instructions.
Price: \$690.00

This new air driven, high frequency polishing machine offers some of the advantages of the ultrasonic systems. The HFP reciprocating polishing machine is compact and weighs only 160 grams. It is easy to handle and has been developed to ensure optimum performance. The patented drive mechanism for the reciprocation motion has been designed to nearly eliminate all harmful vibrations and reduce heat dramatically.

Use any Engis ceramic polishing stone with the HFP to finish slots, ribs and all of your detail work. Works great with diamond files as well as wood sticks & diamond compound for polishing.

Technical specifications:

Drive: Oil lubricated through air regulator 4-6 bar, 2-4 drops per minute	Weight: 160 grams
Frequency: 20,000 strokes per minute	Noise: Less than 78dB @ 6 bar
Stroke: 0.25 mm (.010")	Vibration: Less than 2.5 m/s
Tool-holder capacity: 3.6 mm (.141")	

*The HFP requires an air regulator-dryer and lubricator

Engis Corporation
105 W. Hintz Road
PO Box 9046
Wheeling, Illinois 60090

Distributed by
AJACS
1-800-968-6868